




QUELLE TAILLE DOIS-JE ACHETER ?

La taille varie d'un pilote à un autre. Chacun a sa préférence, et la façon dont vous roulez est également importante pour choisir la bonne taille. Voici un tableau général de tailles que vous pouvez utiliser comme référence.

TAILLE	TAILLE (m)
S	1.58 - 1.70
M	1.67 - 1.80
L	1.75 - 1.87
XL	1.85 - 1.95

QUELLE EST LA LONGUEUR MAXIMALE DE TIGE DE SELLE TÉLESCOPIQUE COMPATIBLE AVEC LE LEVEL ?

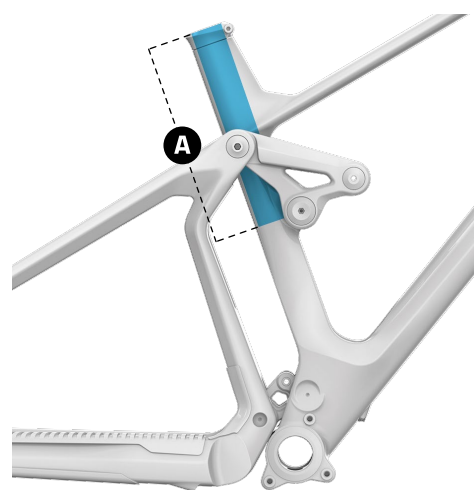

TAILLE	A INSERTION MAXIMUM
S	195 mm
M	200 mm
L	230 mm
XL	270 mm

LEVEL RR

E-MTB SUPERENDURO

8499€

TECHNOLOGIES

FORWARD GEOMETRY
ZERO E-BIKE OPTIMIZED
STEALTH SIDE ALLOY STRUCTURE


📦 150 kg SYSTEM WEIGHT

Ø 29"



FICHES TECHNIQUES

CADRE	Level 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 170mm travel, Forward Geometry, internal removable battery with integrated alloy cover, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers
TAILLES	S: 380mm / M: 420mm / L: 450mm / XL: 490mm
AMORTISSEUR	Öhlins TTX22M 225x75mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, spring preload. Trunnion top mount, 25x10mm bottom bushings
RÉGLAGE DE L'AMORTISSEUR	C10 compression, R35 rebound. Spring rate: S size 251 lbs, M size 297 lbs, L size 343 lbs, XL size 411 lbs
FOURCHE	Öhlins RXF 38 29, 180mm, TTX18 Twin Tube cartridge, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload, ramp chamber
JEU DE DIRECTION	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
POTENCE	Onoff Krypton FG 30mm, 6061 forged alloy, 31.8mm bar bore
CINTRE	Onoff Krypton Carbon 1.0, rise: 25mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm bar bore
POIGNÉES	Onoff Desert, 110mm, 135mm, sizes: S/M L/XL
TIGE DE SELLE	Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm
SELLE	SDG BEL-AIR 3.0, EVA foam, alloy rails
FREIN AVANT	Sram Code RSC, oversized 4-piston caliper, Centerline 220mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads
FREIN ARRIÈRE	Sram Code RSC, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads
MANETTES DE FREIN	Sram Code RSC, SwingLink and lever pivot bearings, tools-free reach and contact point adjust
JANTES	e*thirteen E*Spec Plus, IW30 Hookless, 6069 Welded Aluminum 30mm internal width, tubeless ready, 28F / 32R spokes
RAYONS	e*thirteen custom J-bend, triple-butt alloy, alloy nipples, nipple washers

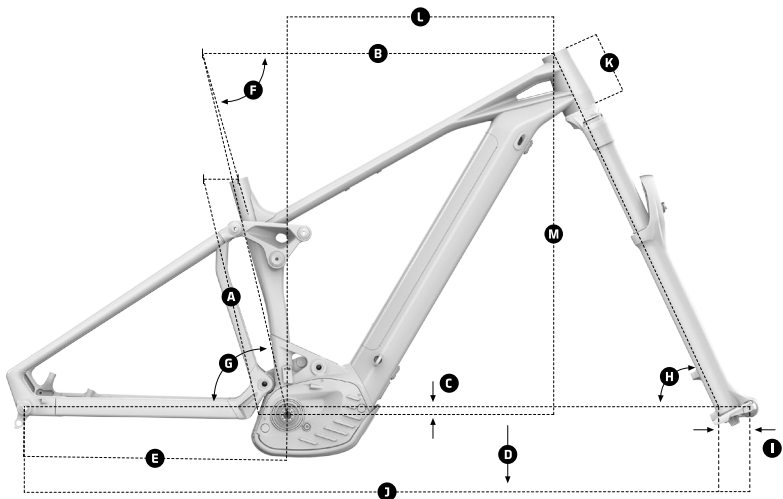

GÉOMÉTRIE

Taille	S	M	L	XL	
A	Longueur de tube de selle	380 mm	420 mm	450 mm	490 mm
B	Longueur de tube supérieur	602 mm	622 mm	647 mm	667 mm
C	Déport d'axe de pédalier	-15	-15	-15	-15
D	Hauteur de l'axe de pédalier	357 mm	357 mm	357 mm	357 mm
E	Longueur de bases	455 mm	455 mm	455 mm	455 mm
F	Angle réel de tube de selle	73.5°	73.5°	73.5°	73.5°
G	Angle effectif de tube de selle	76.5°	76.5°	76.5°	76.5°
H	Angle de direction	65°	65°	65°	65°
I	Fork Offset	44 mm	44 mm	44 mm	44 mm
J	Empattement	1250 mm	1270 mm	1290 mm	1310 mm
K	Longueur de colonne	110mm	110mm	130mm	130 mm
L	Reach	450 mm	470 mm	490 mm	510 mm
M	Stack	632 mm	632 mm	652 mm	652 mm

MODÈLE	COULEUR	S	M	L	XL
Level RR	Bleu Ciel / Noir / Rouge Flamme	010.21275	010.21276	010.21277	010.21278

MOYEU AVANT	e*thirteen Boost 15x110mm, triple-sealed, fully machined aluminum, IS 6 bolts
MOYEU ARRIÈRE	e*thirteen Superboost 12x157mm, triple-sealed, fully machined aluminum w/6-degree engagement, IS 6 bolts
PNEU AVANT	Maxxis Assegai 29x2.5WT, tubeless ready, 3C MAXX GRIP compound, DH casing, 60x2TPI, folding bead
PNEU ARRIÈRE	Maxxis Assegai 29x2.5WT, tubeless ready, 3C MAXX GRIP compound, DH casing, 60x2TPI, folding bead
PÉDALIER	E.13 E*Spec Plus ebike, 165mm
PLATEAUX	Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD
PÉDALES	/
CHAÎNE	Sram GX Eagle, 12s, Powerlock
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Sram X01 Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1
SHIFTERS	Sram Trigger GX Eagle, 12s, X-Actuation 1:1, single click
CASSETTE	Sram PG-1275 10-52 12S
MOTEUR	Bosch Performance Line CX Cruise (25Km/h) GEN4
BATTERIE	Bosch Powertube 625Wh
DISPLAY	Bosch Kiox
PATTE DE DÉRAILLEUR	Mondraker M068
DIVERS	/
POIDS SANS PÉDALES	25.5 kg

LEVEL R

E-MTB SUPERENDURO

6599€

TECHNOLOGIES

FORWARD GEOMETRY
ZERO E-BIKE OPTIMIZED
STEALTH SIDE ALLOY STRUCTURE


📦 150 kg SYSTEM WEIGHT

Ø 29"



FICHES TECHNIQUES

CADRE	Level 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 170mm travel, Forward Geometry, internal removable battery with integrated alloy cover, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers
TAILLES	S: 380mm / M: 420mm / L: 450mm / XL: 490mm
AMORTISSEUR	Fox DHX2 Performance Elite, 225x75mm. Settings: low-speed compression, low-speed rebound, spring preload. Trunnion top mount, 25x10mm bottom bushings
RÉGLAGE DE L'AMORTISSEUR	Medium compression, medium rebound. Spring rate: S/M size 300 lbs, L size 350 lbs, XL size 400 lbs
FOURCHE	Fox 38 29 Float FIT GRIP EVOL Performance, 180mm, e-bike tuned, tapered steerer tube, Boost 15x110mm axle, 44mm offset. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload
JEU DE DIRECTION	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
POTENCE	Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbare
CINTRE	Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbare
POIGNÉES	Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL
TIGE DE SELLE	Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm
SELLE	SDG BEL-AIR 3.0, EVA foam, steel rails
FREIN AVANT	Sram Code R, oversized 4-piston caliper, Centerline 220mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads
FREIN ARRIÈRE	Sram Code R, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads
MANETTES DE FREIN	Sram Code R, tool-free reach adjust
JANTES	DT Swiss H1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes
RAYONS	DT Hybrid SP, straightpull

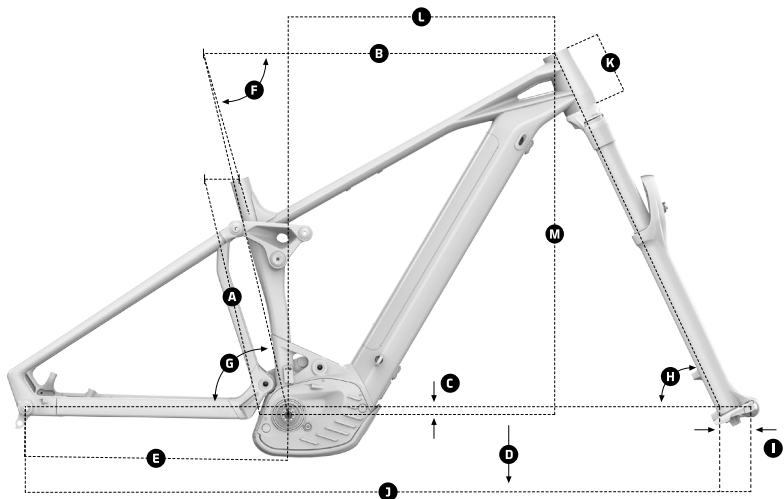

GÉOMÉTRIE

Taille	S	M	L	XL
A Longueur de tube de selle	380 mm	420 mm	450 mm	490 mm
B Longueur de tube supérieur	602 mm	622 mm	647 mm	667 mm
C Déport d'axe de pédalier	-15	-15	-15	-15
D Hauteur de l'axe de pédalier	357 mm	357 mm	357 mm	357 mm
E Longueur de bases	455 mm	455 mm	455 mm	455 mm
F Angle réel de tube de selle	73.5°	73.5°	73.5°	73.5°
G Angle effectif de tube de selle	76.5°	76.5°	76.5°	76.5°
H Angle de direction	65°	65°	65°	65°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Empattement	1250 mm	1270 mm	1290 mm	1310 mm
K Longueur de colonne	110mm	110mm	130mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	632 mm	632 mm	652 mm	652 mm

MODÈLE	COULEUR	S	M	L	XL
Level R	Jaune / Bleu Foncé	010.21271	010.21272	010.21273	010.21274

MOYEU AVANT	DT 370, Boost 15x110mm, IS 6 bolts
MOYEU ARRIÈRE	DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts
PNEU AVANT	Maxxis Assegai 29x2.5WT, tubeless ready, 3C MAXX GRIP compound, DH casing, 60x2TPI, folding bead
PNEU ARRIÈRE	Maxxis Assegai 29x2.5WT, tubeless ready, 3C MAXX GRIP compound, DH casing, 60x2TPI, folding bead
PÉDALIER	E.13 E*Spec Plus ebike, 165mm
PLATEAUX	Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD
PÉDALES	/
CHAÎNE	Sram SX Eagle, 12s, Powerlock
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1
SHIFTERS	Sram Trigger NX Eagle, 12s, X-Actuation 1:1, single click
CASSETTE	Sram PG-1210, 11-50T, 12s
MOTEUR	Bosch Performance Line CX Cruise (25Km/h) GEN4
BATTERIE	Bosch Powertube 625Wh
DISPLAY	Bosch Kiox
PATTE DE DÉRAILLEUR	Mondraker M068
DIVERS	/
POIDS SANS PÉDALES	25.8 kg

CRAFTY CARBON RR SL

E-MTB ENDURO

12299€

TECHNOLOGIES

MIND
FORWARD GEOMETRY
ZERO E-BIKE OPTIMIZED
STEALTH CARBON AIR


📦 150 kg SYSTEM WEIGHT

Ø 29"



FICHES TECHNIQUES

CADRE	Crafty Stealth Air full Carbon, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers
TAILLES	S: 380mm / M: 420mm / L: 450mm / XL: 490mm
AMORTISSEUR	Fox Float DPS Factory Kashima, 205x65mm. Settings: Compression 3 positions lever, low-speed compression, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
RÉGLAGE DE L'AMORTISSEUR	Medium compression, Medium rebound, 0.4 volume spacer
FOURCHE	Fox 36 29 Float FIT4 EVOL Factory Kashima, 160mm, e-bike optimized, tapered steerer tube, Boost 15x110mm axle, 44mm offset, 68mm OD crown. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload
JEU DE DIRECTION	Acros custom for 1-1/2" head tube, angular contact bearings 40x52x7, Internal cable routing
POTENCE	Onoff Krypton FG 30mm, 6061 forged alloy, 31.8mm barbare
CINTRE	Onoff Krypton Carbon 1.0, rise: 25mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbare
POIGNÉES	Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL
TIGE DE SELLE	RockShox Reverb Stealth AXS, diameter 31.6mm, S size: 390x125mm, M size: 440x150mm, L/XL size: 440x170mm
SELLE	Fizik Antares Large R1
FREIN AVANT	Shimano XTR M9120, 4 piston caliper, MT900 ICE-Tech 203mm CenterLock rotor, resin pads with fin
FREIN ARRIÈRE	Shimano XTR M9120, 4 piston caliper, MT910 ICE-Tech 203mm CenterLock rotor, resin pads with fin
MANETTES DE FREIN	Shimano XTR M9120, ergonomic antiskid lever with servo wave, tool less reach adjust, free stroke adjust
JANTES	DT Swiss HXC1200 Carbon Spline 29, 30mm internal width, hookless, tubeless ready, 28 spokes
RAYONS	DT Hybrid SP, straightpull

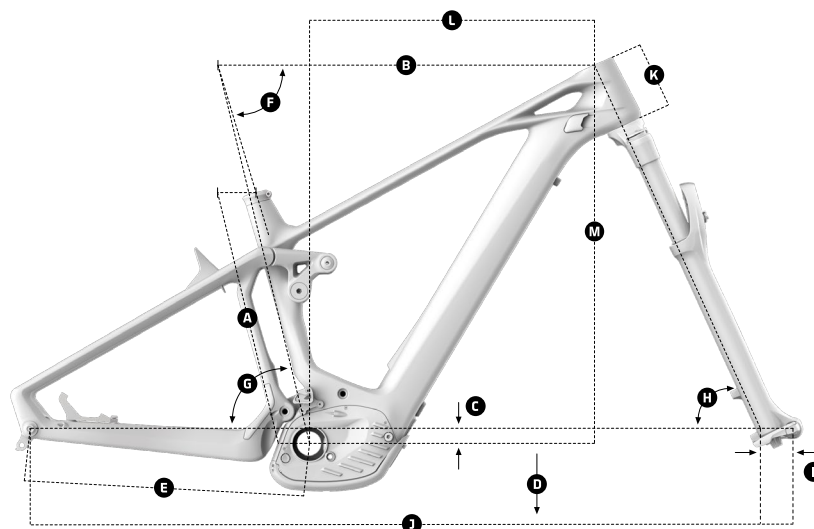

GÉOMÉTRIE

Taille	S	M	L	XL
A Longueur de tube de selle	380 mm	420 mm	450 mm	480 mm
B Longueur de tube supérieur	605 mm	625 mm	650 mm	670 mm
C Déport d'axe de pédalier	-25 mm	-25 mm	-25 mm	-25 mm
D Hauteur de l'axe de pédalier	350 mm	350 mm	350 mm	350 mm
E Longueur de bases	455 mm	455 mm	455 mm	455 mm
F Angle réel de tube de selle	73.5°	73.5°	73.5°	73.5°
G Angle effectif de tube de selle	76°	76°	76°	76°
H Angle de direction	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Empattement	1225 mm	1245 mm	1270 mm	1290 mm
K Longueur de colonne	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm

MODÈLE	COULEUR	S	M	L	XL
Crafty Carbon RR SL	Noir Phantom / Argent Racing	010.21267	010.21268	010.21269	010.21270

MOYEU AVANT	DT 240, Boost 15x110mm, CenterLock
MOYEU ARRIÈRE	DT 240, Boost 12x148mm, 24T Ratchet system, CenterLock
PNEU AVANT	Maxxis Rekon 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
PNEU ARRIÈRE	Maxxis Rekon 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
PÉDALIER	E.13 TRS Race carbon ebike, 165mm
PLATEAUX	Sram X-Sync 2 Eagle 34T, alloy, narrow-wide, 104 BCD
PÉDALES	/
CHAÎNE	Sram GX Eagle, 12s, Powerlock
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Sram X01 Eagle AXS, Type 2.1 roller bearing clutch, cage lock, long carbon cage, 1x12s, X-actuation 1:1
SHIFTERS	Sram Eagle AXS, 12s
CASSETTE	Sram XG-1295, 10-50T, 12s
MOTEUR	Bosch Performance Line CX Cruise (25Km/h) GEN4
BATTERIE	Bosch Powertube 625Wh
DISPLAY	Bosch Kiox
PATTE DE DÉRAILLEUR	Mondraker M068
DIVERS	/
POIDS SANS PÉDALES	20.0 kg

CRAFTY CARBON XR

E-MTB ENDURO

9499€

TECHNOLOGIES

MIND
FORWARD GEOMETRY
ZERO E-BIKE OPTIMIZED
STEALTH CARBON AIR


📦 150 kg SYSTEM WEIGHT

Ø 29"



FICHES TECHNIQUES

CADRE	Crafty Stealth Air full Carbon, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers
TAILLES	S: 380mm / M: 420mm / L: 450mm / XL: 490mm
AMORTISSEUR	Öhlins TTX Air 205X65mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
RÉGLAGE DE L'AMORTISSEUR	C40 compression, R60 rebound
FOURCHE	Öhlins RXF 38 29, 170mm, TTX18 Twin Tube cartridge, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload, ramp chamber
JEU DE DIRECTION	Acros custom for 1-1/2" head tube, angular contact bearings 40x52x7, Internal cable routing
POTENCE	Onoff Krypton FG 30mm, 6061 forged alloy, 31.8mm barbare
CINTRE	Onoff Krypton Carbon 1.0, rise: 25mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbare
POIGNÉES	Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL
TIGE DE SELLE	Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm
SELLE	Fizik Antares R7
FREIN AVANT	Sram Code RSC, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads
FREIN ARRIÈRE	Sram Code RSC, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads
MANETTES DE FREIN	Sram Code RSC, SwingLink and lever pivot bearings, tools-free reach and contact point adjust
JANTES	DT Swiss HX1501 Spline One 29, 30mm internal width, welded aluminum, tubeless ready, 28 spokes
RAYONS	DT Hybrid SP, straightpull

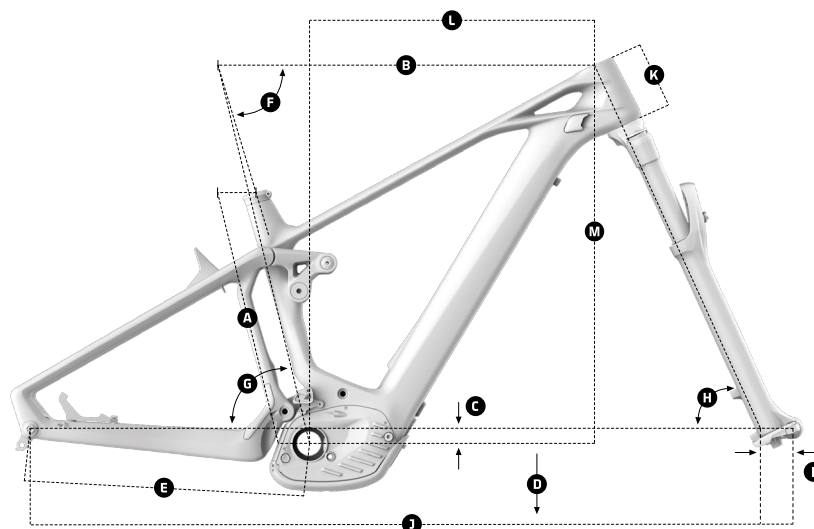

GÉOMÉTRIE

Taille	S	M	L	XL
A Longueur de tube de selle	380 mm	420 mm	450 mm	480 mm
B Longueur de tube supérieur	615 mm	635 mm	660 mm	680 mm
C Déport d'axe de pédalier	-17 mm	-17 mm	-17 mm	-17 mm
D Hauteur de l'axe de pédalier	358 mm	358 mm	358 mm	358 mm
E Longueur de bases	455 mm	455 mm	455 mm	455 mm
F Angle réel de tube de selle	72.5°	72.5°	72.5°	72.5°
G Angle effectif de tube de selle	75°	75°	75°	75°
H Angle de direction	64.5°	64.5°	64.5°	64.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Empattement	1235 mm	1255 mm	1280 mm	1300 mm
K Longueur de colonne	110 mm	110 mm	130 mm	130 mm
L Reach	440 mm	460 mm	480 mm	500 mm
M Stack	632 mm	632 mm	650 mm	650 mm

MODÈLE	COULEUR	S	M	L	XL
Crafty Carbon XR	Carbon / Jaune Öhlins / Gris Nimbus	010.21279	010.21280	010.21281	010.21282

MOYEU AVANT	DT 240, Boost 15x110mm, IS 6 bolts
MOYEU ARRIÈRE	DT 240, Boost 12x148mm, 24T Ratchet system, IS 6 bolts
PNEU AVANT	Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
PNEU ARRIÈRE	Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
PÉDALIER	E.13 E*Spec Plus ebike, 165mm
PLATEAUX	Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD
PÉDALES	/
CHAÎNE	Sram NX Eagle, 12s, Powerlock
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Sram X01 Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1
SHIFTERS	Sram Trigger GX Eagle, 12s, X-Actuation 1:1, single click
CASSETTE	Sram XG-1275, 10-52T, 12s
MOTEUR	Bosch Performance Line CX Cruise (25Km/h) GEN4
BATTERIE	Bosch Powertube 625Wh
DISPLAY	Bosch Kiox
PATTE DE DÉRAILLEUR	Mondraker M068
DIVERS	/
POIDS SANS PÉDALES	22.5 kg

CRAFTY CARBON RR

E-MTB ENDURO

8799€

TECHNOLOGIES

MIND
FORWARD GEOMETRY
ZERO E-BIKE OPTIMIZED
STEALTH CARBON AIR


📦 150 kg SYSTEM WEIGHT

Ø 29"



FICHES TECHNIQUES

CADRE	Crafty Stealth Air full Carbon, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers
TAILLES	S: 380mm / M: 420mm / L: 450mm / XL: 490mm
AMORTISSEUR	Fox Float DPS Factory Kashima, 205x65mm. Settings: Compression 3 positions lever, low-speed compression, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
RÉGLAGE DE L'AMORTISSEUR	Medium compression, Medium rebound, 0.4 volume spacer
FOURCHE	Fox 36 29 Float FIT4 EVOL Factory Kashima, 160mm, e-bike optimized, tapered steerer tube, Boost 15x110mm axle, 44mm offset, 68mm OD crown. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload
JEU DE DIRECTION	Acros custom for 1-1/2" head tube, angular contact bearings 40x52x7, Internal cable routing
POTENCE	Onoff Krypton FG 30mm, 6061 forged alloy, 31.8mm barbare
CINTRE	Onoff Krypton Carbon 1.0, rise: 25mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbare
POIGNÉES	Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL
TIGE DE SELLE	Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm
SELLE	Fizik Antares R7
FREIN AVANT	Shimano XT M8120, 4 piston caliper, MT800 ICE-Tech 203mm CenterLock rotor, resin pads with fin
FREIN ARRIÈRE	Shimano XT M8120, 4 piston caliper, MT810 ICE-Tech 203mm CenterLock rotor, resin pads with fin
MANETTES DE FREIN	Shimano XT M8100, ergonomic antiskid lever with servo wave, tool less reach adjust, free stroke adjust
JANTES	DT Swiss HX1501 Spline One 29, 30mm internal width, tubeless ready, 28 spokes
RAYONS	DT Hybrid SP, straightpull

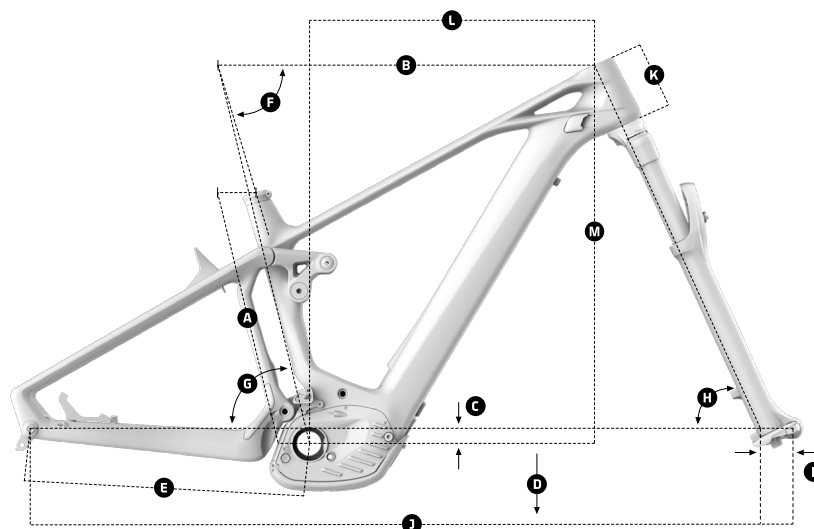

GÉOMÉTRIE

Taille	S	M	L	XL
A Longueur de tube de selle	380 mm	420 mm	450 mm	480 mm
B Longueur de tube supérieur	605 mm	625 mm	650 mm	670 mm
C Déport d'axe de pédalier	-25 mm	-25 mm	-25 mm	-25 mm
D Hauteur de l'axe de pédalier	350 mm	350 mm	350 mm	350 mm
E Longueur de bases	455 mm	455 mm	455 mm	455 mm
F Angle réel de tube de selle	73.5°	73.5°	73.5°	73.5°
G Angle effectif de tube de selle	76°	76°	76°	76°
H Angle de direction	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Empattement	1225 mm	1245 mm	1270 mm	1290 mm
K Longueur de colonne	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm

MODÈLE	COULEUR	S	M	L	XL
Crafty Carbon RR	Bleu Foncé / Blanc Cassé / Orange	010.21263	010.21264	010.21265	010.21266

MOYEU AVANT	DT 240, Boost 15x110mm, CenterLock
MOYEU ARRIÈRE	DT 240, Boost 12x148mm, 24T Ratchet system, CenterLock
PNEU AVANT	Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
PNEU ARRIÈRE	Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
PÉDALIER	E.13 TRS Race carbon ebike, 165mm
PLATEAUX	Shimano E8000 34T, steel, 104 BCD
PÉDALES	/
CHAÎNE	Shimano XT M8100, 12s, Quick-link
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Shimano XT M8100, SGS, Shadow+, 12s
SHIFTERS	Shimano XT M8100, Rapid Fire Plus, 12s
CASSETTE	Shimano XT M8100 10-51T Hyperglide+, 12s
MOTEUR	Bosch Performance Line CX Cruise (25Km/h) GEN4
BATTERIE	Bosch Powertube 625Wh
DISPLAY	Bosch Kiox
PATTE DE DÉRAILLEUR	Mondraker M068
DIVERS	/
POIDS SANS PÉDALES	21.3 kg

CRAFTY CARBON R

E-MTB ENDURO

7499€

TECHNOLOGIES

MIND
FORWARD GEOMETRY
ZERO E-BIKE OPTIMIZED
STEALTH CARBON AIR


📦 150 kg SYSTEM WEIGHT

Ø 29"



FICHES TECHNIQUES

CADRE	Crafty Stealth Air full Carbon, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers
TAILLES	S: 380mm / M: 420mm / L: 450mm / XL: 490mm
AMORTISSEUR	Fox Float DPS Performance, 205x65mm. Settings: Compression 3 positions lever, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
RÉGLAGE DE L'AMORTISSEUR	Medium compression, Medium rebound, 0.4 volume spacer
FOURCHE	Fox 36 29 Float FIT GRIP EVOL Performance, 160mm, e-bike optimized, tapered steerer tube, Boost 15x110mm axle, 44mm offset, 68mm OD crown. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload
JEU DE DIRECTION	Acros custom for 1-1/2" head tube, angular contact bearings 40x52x7, Internal cable routing
POTENCE	Onoff Krypton FG 30mm, 6061 forged alloy, 31.8mm barbare
CINTRE	Onoff Krypton 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbare
POIGNÉES	Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL
TIGE DE SELLE	Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm
SELLE	Fizik Antares R7
FREIN AVANT	Sram G2 RSC, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads
FREIN ARRIÈRE	Sram G2 RSC, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads
MANETTES DE FREIN	Sram G2 RSC, SwingLink and lever pivot bearings, tools-free reach and contact point adjust
JANTES	DT Swiss H1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes
RAYONS	DT Hybrid SP, straightpull

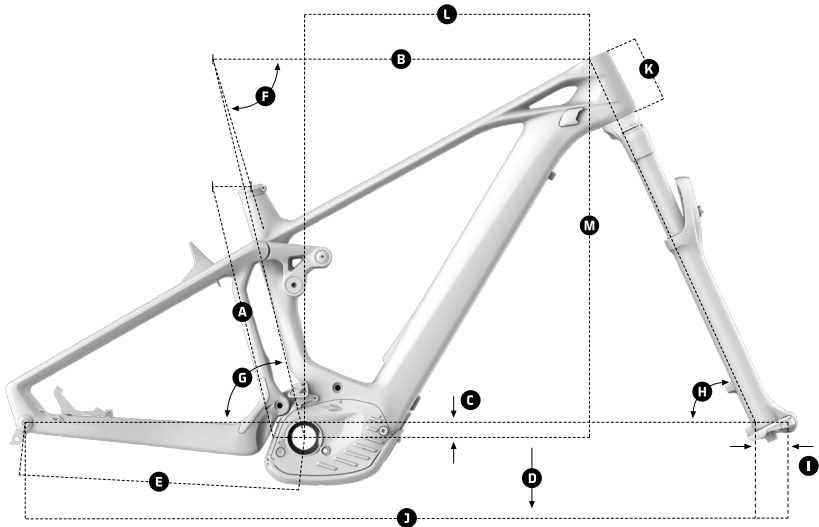

GÉOMÉTRIE

Taille	S	M	L	XL	
A	Longueur de tube de selle	380 mm	420 mm	450 mm	480 mm
B	Longueur de tube supérieur	605 mm	625 mm	650 mm	670 mm
C	Déport d'axe de pédalier	-25 mm	-25 mm	-25 mm	-25 mm
D	Hauteur de l'axe de pédalier	350 mm	350 mm	350 mm	350 mm
E	Longueur de bases	455 mm	455 mm	455 mm	455 mm
F	Angle réel de tube de selle	73.5°	73.5°	73.5°	73. 5°
G	Angle effectif de tube de selle	76°	76°	76°	76°
H	Angle de direction	65.5°	65.5°	65.5°	65.5°
I	Fork Offset	44 mm	44 mm	44 mm	44 mm
J	Empattement	1225 mm	1245 mm	1270 mm	1290 mm
K	Longueur de colonne	110 mm	110 mm	130 mm	130 mm
L	Reach	450 mm	470 mm	490 mm	510 mm
M	Stack	622 mm	622 mm	640 mm	640 mm

MODÈLE	COULEUR	S	M	L	XL
Crafty Carbon R	Carbon / Blanc Cassé / Rouge Flamme	010.21259	010.21260	010.21261	010.21262

MOYEU AVANT	DT 370, Boost 15x110mm, IS 6 bolts
MOYEU ARRIÈRE	DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts
PNEU AVANT	Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
PNEU ARRIÈRE	Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
PÉDALIER	E.13 E*Spec Plus ebike, 165mm
PLATEAUX	Sram X-Sync 2 Eagle 34T, alloy, narrow-wide, 104 BCD
PÉDALES	/
CHAÎNE	Sram NX Eagle, 12s, Powerlock
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1
SHIFTERS	Sram Trigger NX Eagle, 12s, X-Actuation 1:1, single click
CASSETTE	Sram XG-1230, 11-50T, 12s
MOTEUR	Bosch Performance Line CX Cruise (25Km/h) GEN4
BATTERIE	Bosch Powertube 625Wh
DISPLAY	Bosch Kiox
PATTE DE DÉRAILLEUR	Mondraker M068
DIVERS	/
POIDS SANS PÉDALES	22.0 kg

CRAFTY RR

E-MTB ENDURO

6899€

TECHNOLOGIES

FORWARD GEOMETRY
ZERO E-BIKE OPTIMIZED
STEALTH SIDE ALLOY STRUCTURE


📦 150 kg SYSTEM WEIGHT

Ø 29"



FICHES TECHNIQUES

CADRE	Crafty 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal removable battery with integrated alloy cover, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers
TAILLES	S: 380mm / M: 420mm / L: 450mm / XL: 490mm
AMORTISSEUR	Fox Float DPX2 LV EVOL Factory Kashima, 205x65mm. Settings: compression 3 positions lever, low-speed compression, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
RÉGLAGE DE L'AMORTISSEUR	CEC001 compression, Medium rebound, 0.2 volume spacer
FOURCHE	Fox 38 29 Float FIT4 EVOL Factory Kashima, 160mm, e-bike tuned, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload
JEU DE DIRECTION	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
POTENCE	Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbare
CINTRE	Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbare
POIGNÉES	Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL
TIGE DE SELLE	Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm
SELLE	SDG BEL-AIR 3.0, EVA foam, alloy rails
FREIN AVANT	Sram Code R, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads
FREIN ARRIÈRE	Sram Code R, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads
MANETTES DE FREIN	Sram Code R, tool-free reach adjust
JANTES	DT Swiss H1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes
RAYONS	DT Hybrid SP, straightpull

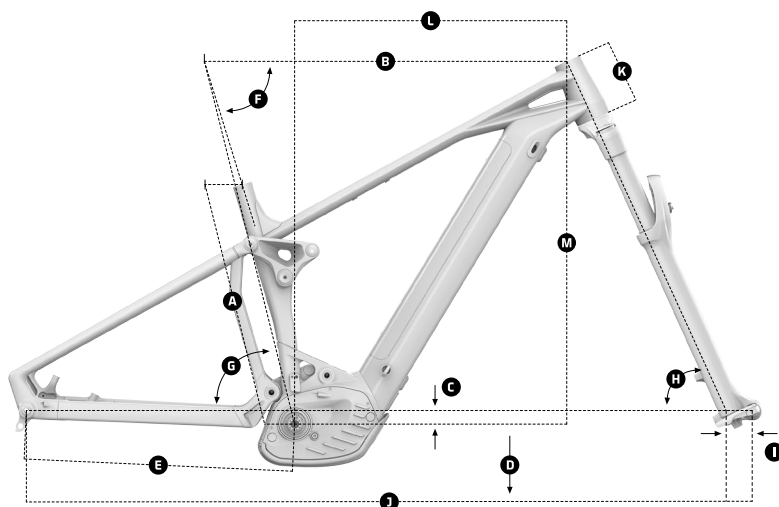

GÉOMÉTRIE

Taille	S	M	L	XL
A Longueur de tube de selle	380 mm	420 mm	450 mm	490 mm
B Longueur de tube supérieur	605 mm	625 mm	650 mm	670 mm
C Déport d'axe de pédalier	-25 mm	-25 mm	-25 mm	-25 mm
D Hauteur de l'axe de pédalier	350 mm	350 mm	350 mm	350 mm
E Longueur de bases	455 mm	455 mm	455 mm	455 mm
F Angle réel de tube de selle	73.5°	73.5°	73.5°	73.5°
G Angle effectif de tube de selle	76°	76°	76°	76°
H Angle de direction	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Empattement	1225 mm	1245 mm	1265 mm	1285 mm
K Longueur de colonne	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm

MODÈLE	COULEUR	S	M	L	XL
Crafty RR	Argent Racing / Noir / Rouge Flamme	010.21255	010.21256	010.21257	010.21258

MOYEU AVANT	DT 370, Boost 15x110mm, IS 6 bolts
MOYEU ARRIÈRE	DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts
PNEU AVANT	Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
PNEU ARRIÈRE	Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
PÉDALIER	Race Face Aeffect ebike, 165mm
PLATEAUX	Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD
PÉDALES	/
CHAÎNE	Sram NX Eagle, 12s, Powerlock
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1
SHIFTERS	Sram Trigger GX Eagle, 12s, X-Actuation 1:1, single click
CASSETTE	Sram XG-1230, 11-50T, 12s
MOTEUR	Bosch Performance Line CX Cruise (25Km/h) GEN4
BATTERIE	Bosch Powertube 625Wh
DISPLAY	Bosch Kiox
PATTE DE DÉRAILLEUR	Mondraker M068
DIVERS	/
POIDS SANS PÉDALES	24.6 kg

CRAFTY R

E-MTB ENDURO

5999€



TECHNOLOGIES

FORWARD GEOMETRY
ZERO E-BIKE OPTIMIZED
STEALTH SIDE ALLOY STRUCTURE


150 kg SYSTEM WEIGHT

Ø 29"



FICHES TECHNIQUES

CADRE	Crafty 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal removable battery with integrated alloy cover, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers
TAILLES	S: 380mm / M: 420mm / L: 450mm / XL: 490mm
AMORTISSEUR	Fox Float DPX2 LV EVOL Performance, 205x65mm. Settings: compression 3 positions lever, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
RÉGLAGE DE L'AMORTISSEUR	CEC001 compression, Medium rebound, 0.2 volume spacer
FOURCHE	Fox 38 29 Float FIT GRIP EVOL Performance, 160mm, e-bike tuned, tapered steerer tube, Boost 15x110mm axle, 44mm offset. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload
JEU DE DIRECTION	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
POTENCE	Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbare
CINTRE	Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbare
POIGNÉES	Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL
TIGE DE SELLE	Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm
SELLE	SDG BEL-AIR 3.0, EVA foam, steel rails
FREIN AVANT	Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads
FREIN ARRIÈRE	Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads
MANETTES DE FREIN	Sram G2 R, tool-free reach adjust
JANTES	DT Swiss HI900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes
RAYONS	DT Hybrid SP, straightpull

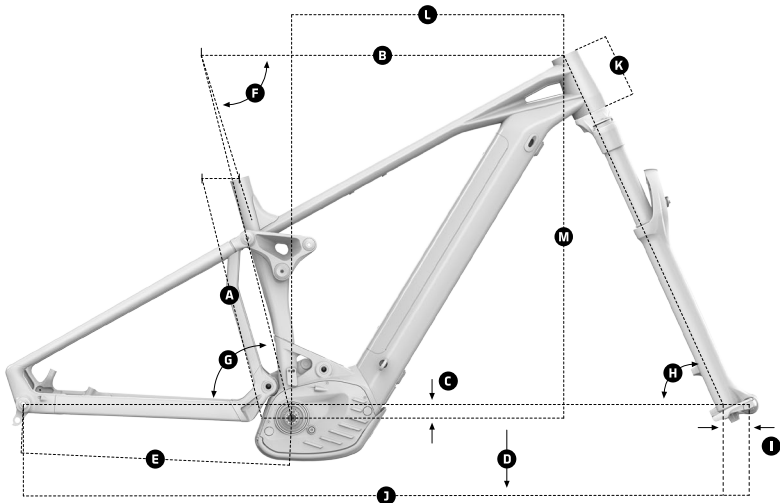

GÉOMÉTRIE

Taille	S	M	L	XL
A	Longueur de tube de selle			
B	380 mm	420 mm	450 mm	490 mm
C	Longueur de tube supérieur			
D	605 mm	625 mm	650 mm	670 mm
E	Déport d'axe de pédalier			
F	-25 mm	-25 mm	-25 mm	-25 mm
G	Hauteur de l'axe de pédalier			
H	350 mm	350 mm	350 mm	350 mm
I	455 mm	455 mm	455 mm	455 mm
J	Angle réel de tube de selle			
K	73.5°	73.5°	73.5°	73.5°
L	Angle effectif de tube de selle			
M	76°	76°	76°	76°
N	Angle de direction			
O	65.5°	65.5°	65.5°	65.5°
P	Fork Offset			
Q	44 mm	44 mm	44 mm	44 mm
R	Empattement			
S	1225 mm	1245 mm	1265 mm	1285 mm
T	Longueur de colonne			
U	110 mm	110 mm	130 mm	130 mm
V	Reach			
W	450 mm	470 mm	490 mm	510 mm
X	Stack			
Y	622 mm	622 mm	640 mm	640 mm

MODÈLE	COULEUR	S	M	L	XL
Crafty R	Noir / Blanc Cassé	010.21241	010.21242	010.21243	010.21244
Crafty R	Noir / Orange / Gris Nimbus	010.21247	010.21248	010.21249	010.21250

MOYEU AVANT	DT 370, Boost 15x110mm, IS 6 bolts
MOYEU ARRIÈRE	DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts
PNEU AVANT	Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
PNEU ARRIÈRE	Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
PÉDALIER	Race Face Aeffect ebike, 165mm
PLATEAUX	Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD
PÉDALES	/
CHAÎNE	Sram SX Eagle, 12s, Powerlock
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1
SHIFTERS	Sram Trigger NX Eagle, 12s, X-Actuation 1:1, single click
CASSETTE	Sram PG-1210, 11-50T, 12s
MOTEUR	Bosch Performance Line CX Cruise (25Km/h) GEN4
BATTERIE	Bosch Powertube 625Wh
DISPLAY	Bosch Kiox
PATTE DE DÉRAILLEUR	Mondraker M068
DIVERS	/
POIDS SANS PÉDALES	24.9 kg

DUSK RR

E-MTB ENDURO

6499€

BATTERIE
EXTERNE OPTIONNELLE



TECHNOLOGIES

FORWARD GEOMETRY
ZERO E-BIKE OPTIMIZED
STEALTH SIDE ALLOY STRUCTURE


📦 150 kg SYSTEM WEIGHT

Ø 29"



FICHES TECHNIQUES

CADRE	Dusk 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, integrated internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor. *Optional external battery
TAILLES	S: 380mm / M: 420mm / L: 450mm / XL: 490mm
AMORTISSEUR	Fox Float DPS LV EVOL Performance, 205x65mm. Settings: Compression 3 positions lever, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
RÉGLAGE DE L'AMORTISSEUR	Medium compression, Medium rebound, 0.4 volume spacer
FOURCHE	Fox 36 29 Float FIT4 EVOL Factory Kashima, 160mm, e-bike optimized, tapered steerer tube, Boost 15x110mm axle, 44mm offset, 68mm OD crown. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload
JEU DE DIRECTION	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
POTENCE	Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbare
CINTRE	Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbare
POIGNÉES	Onoff Twin, 1lock-on, 135mm
TIGE DE SELLE	Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm
SELLE	Mondraker e-MTB custom design
FREIN AVANT	Shimano M6120, 4 piston caliper, RT66 203mm IS 6 bolts rotor, resin pads
FREIN ARRIÈRE	Shimano M6120, 4 piston caliper, RT66 203mm IS 6 bolts rotor, resin pads
MANETTES DE FREIN	Shimano M6100, servo wave, alloy lever, tooled reach adjust
JANTES	DT Swiss H1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes
RAYONS	DT Hybrid SP, straightpull

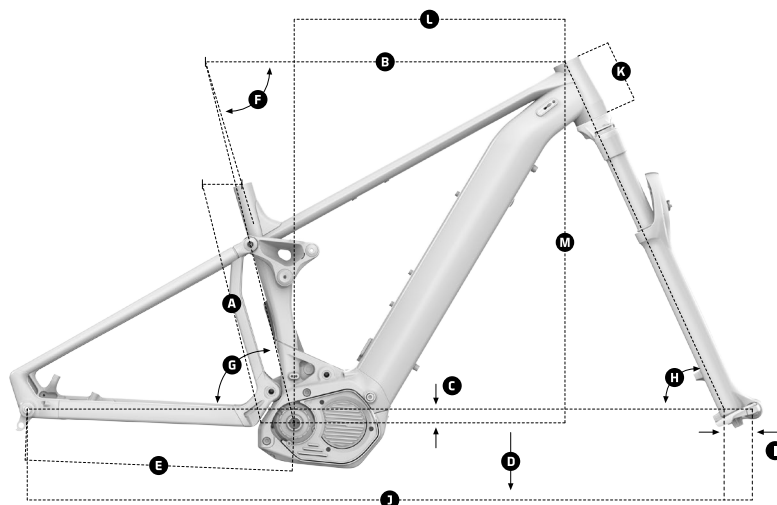

GÉOMÉTRIE

Taille	S	M	L	XL
A Longueur de tube de selle	380 mm	420 mm	450 mm	490 mm
B Longueur de tube supérieur	605 mm	625 mm	650 mm	670 mm
C Déport d'axe de pédalier	-25 mm	-25 mm	-25 mm	-25 mm
D Hauteur de l'axe de pédalier	350 mm	350 mm	350 mm	350 mm
E Longueur de bases	455 mm	455 mm	455 mm	455 mm
F Angle réel de tube de selle	73.5°	73.5°	73.5°	73.5°
G Angle effectif de tube de selle	76°	76°	76°	76°
H Angle de direction	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Empattement	1225 mm	1245 mm	1265 mm	1285 mm
K Longueur de colonne	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm

MODÈLE	COULEUR	S	M	L	XL
Dusk RR	Blanc Cassé / Bleu Foncé / Orange	010.21310	010.21311	010.21312	010.21313

MOYEU AVANT	DT 370, Boost 15x110mm, IS 6 bolts
MOYEU ARRIÈRE	DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts
PNEU AVANT	Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
PNEU ARRIÈRE	Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
PÉDALIER	Shimano STEPS EM600, 165mm
PLATEAUX	Shimano E8000 34T, steel, 104 BCD
PÉDALES	/
CHAÎNE	Shimano Deore M6100, 12s, Quick-link
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Shimano XT M8100, SGS, Shadow+, 12s
SHIFTERS	Shimano Deore M6100, Rapid Fire Plus, 12s
CASSETTE	Shimano Deore M6100, 10-51T Hyperglide+, 12s
MOTEUR	Shimano STEPS EP800
BATTERIE	Simplo internal 630Wh
DISPLAY	Shimano STEPS E7000
PATTE DE DÉRAILLEUR	Mondraker M068
DIVERS	*Optional external battery: Simplo 360Wh
POIDS SANS PÉDALES	23.0 kg

DUSK R

E-MTB ENDURO

5499€

BATTERIE
EXTERNE OPTIONNELLE



TECHNOLOGIES

FORWARD GEOMETRY
ZERO E-BIKE OPTIMIZED
STEALTH SIDE ALLOY STRUCTURE


📦 150 kg SYSTEM WEIGHT

Ø 29"



FICHES TECHNIQUES

CADRE	Dusk 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, integrated internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor.*Optional external battery
TAILLES	S: 380mm / M: 420mm / L: 450mm / XL: 490mm
AMORTISSEUR	Fox Float DPS LV EVOL Performance, 205x65mm. Settings: Compression 3 positions lever, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
RÉGLAGE DE L'AMORTISSEUR	Medium compression, Medium rebound, 0.4 volume spacer
FOURCHE	Fox 36 29 Float FIT GRIP EVOL Rhythm, 160mm, e-bike tuned, tapered steerer tube, Boost 15x110mm axle, 44mm offset. Settings: sweep adjust compression, low-speed rebound, air preload
JEU DE DIRECTION	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
POTENCE	Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbare
CINTRE	Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbare
POIGNÉES	Onoff Twin, 1lock-on, 135mm
TIGE DE SELLE	Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm
SELLE	Mondraker e-MTB custom design
FREIN AVANT	Shimano MT4120, 4 piston caliper, RT66 203mm IS 6 bolts rotor, resin pads
FREIN ARRIÈRE	Shimano MT4120, 4 piston caliper, RT66 203mm IS 6 bolts rotor, resin pads
MANETTES DE FREIN	Shimano M4100, servo wave, alloy lever, tooled reach adjust
JANTES	MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes
RAYONS	CN round stainless steel

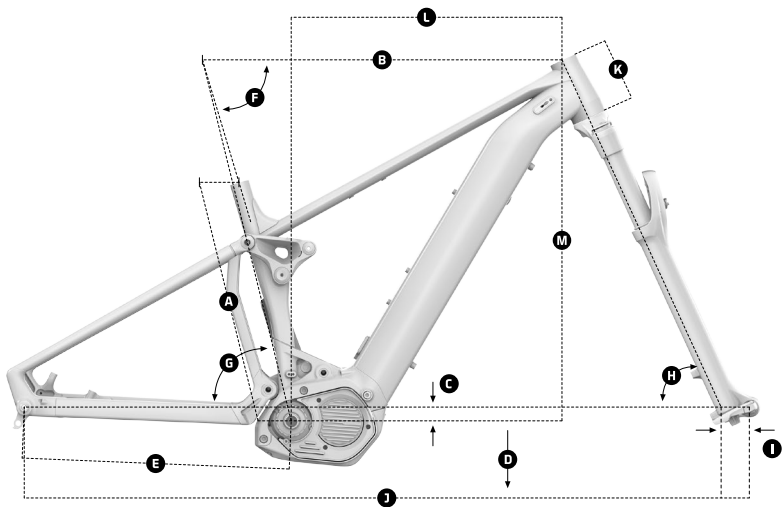

GÉOMÉTRIE

Taille	S	M	L	XL
A Longueur de tube de selle	380 mm	420 mm	450 mm	490 mm
B Longueur de tube supérieur	605 mm	625 mm	650 mm	670 mm
C Déport d'axe de pédalier	-25 mm	-25 mm	-25 mm	-25 mm
D Hauteur de l'axe de pédalier	350 mm	350 mm	350 mm	350 mm
E Longueur de bases	455 mm	455 mm	455 mm	455 mm
F Angle réel de tube de selle	73.5°	73.5°	73.5°	73.5°
G Angle effectif de tube de selle	76°	76°	76°	76°
H Angle de direction	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Empattement	1225 mm	1245 mm	1265 mm	1285 mm
K Longueur de colonne	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm

MODÈLE	COULEUR	S	M	L	XL
Dusk R	Noir / Vert Frost / Jaune	010.21296	010.21297	010.21298	010.21299

MOYEU AVANT	Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts
MOYEU ARRIÈRE	Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts
PNEU AVANT	Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
PNEU ARRIÈRE	Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
PÉDALIER	Shimano STEPS EM600, 165mm
PLATEAUX	Shimano E8000 34T, steel, 104 BCD
PÉDALES	/
CHAÎNE	Sram SX Eagle, 12s, Powerlock
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
SHIFTERS	Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click
CASSETTE	Sram PG-1210, 11-50T, 12s
MOTEUR	Shimano STEPS EP800
BATTERIE	Simplo internal 630Wh
DISPLAY	Shimano STEPS E7000
PATTE DE DÉRAILLEUR	Mondraker M068
DIVERS	*Optional external battery: Simplo 360Wh
POIDS SANS PÉDALES	23.6 kg

CHASER 29

E-MTB ENDURO

4799€



TECHNOLOGIES

FORWARD GEOMETRY
ZERO E-BIKE OPTIMIZED
STEALTH SIDE ALLOY STRUCTURE


📦 150 kg SYSTEM WEIGHT

Ø 29"



FICHES TECHNIQUES

CADRE	Chaser 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers, shock mudguard
TAILLES	S: 380mm / M: 420mm / L: 450mm / XL: 490mm
AMORTISSEUR	RockShox Deluxe Select R Debonair, 205x65mm. Settings: Low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
RÉGLAGE DE L'AMORTISSEUR	Light compression, Light rebound, 1 Token
FOURCHE	RockShox 35 Silver TK 29, 160mm, TurnKey, Solo Air, tapered steerer tube, Boost 15x110mm axle, 35mm steel stanchions, 44mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload
JEU DE DIRECTION	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
POTENCE	Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbare
CINTRE	Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbare
POIGNÉES	Onoff Twin, 1lock-on, 135mm
TIGE DE SELLE	Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm
SELLE	Mondraker e-MTB custom design
FREIN AVANT	Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads
FREIN ARRIÈRE	Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads
MANETTES DE FREIN	Sram G2 R, tool-free reach adjust
JANTES	MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes
RAYONS	CN round stainless steel

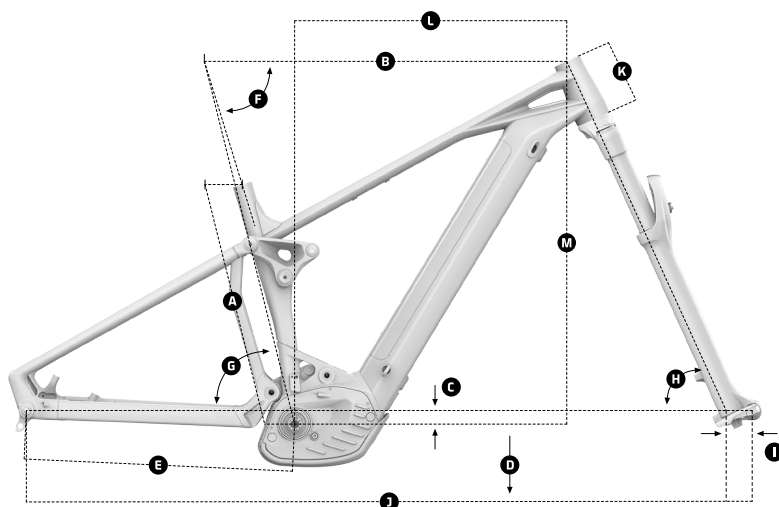

GÉOMÉTRIE

Taille	S	M	L	XL
A Longueur de tube de selle	380 mm	420 mm	450 mm	490 mm
B Longueur de tube supérieur	605 mm	625 mm	650 mm	670 mm
C Déport d'axe de pédalier	-25 mm	-25 mm	-25 mm	-25 mm
D Hauteur de l'axe de pédalier	350 mm	350 mm	350 mm	350 mm
E Longueur de bases	455 mm	455 mm	455 mm	455 mm
F Angle réel de tube de selle	73.5°	73.5°	73.5°	73.5°
G Angle effectif de tube de selle	76°	76°	76°	76°
H Angle de direction	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Empattement	1225 mm	1245 mm	1265 mm	1285 mm
K Longueur de colonne	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm

MODÈLE	COULEUR	S	M	L	XL
Chaser 29	Noir / Rouge Flamme / Blanc	010.21225	010.21226	010.21227	010.21228
Chaser 29	Rouge Flamme / Noir	010.21233	010.21234	010.21235	010.21236

MOYEU AVANT	Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts
MOYEU ARRIÈRE	Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts
PNEU AVANT	Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
PNEU ARRIÈRE	Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
PÉDALIER	Race Face Aeffect ebike, 165mm
PLATEAUX	Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD
PÉDALES	/
CHAÎNE	Sram SX Eagle, 12s, Powerlock
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
SHIFTERS	Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click
CASSETTE	Sram PG-1210, 11-50T, 12s
MOTEUR	Bosch Performance Line CX Cruise (25Km/h) GEN4
BATTERIE	Bosch Powertube 625Wh
DISPLAY	Bosch Purion
PATTE DE DÉRAILLEUR	Mondraker M068
DIVERS	/
POIDS SANS PÉDALES	24.8 kg

CHASER + E-MTB ENDURO

4799€



TECHNOLOGIES

FORWARD GEOMETRY
ZERO E-BIKE OPTIMIZED
STEALTH SIDE ALLOY STRUCTURE

📦 150 kg SYSTEM WEIGHT


Ø 27"5 +



① Le diamètre des roues qui figurent sur cette image ne correspond pas à ce modèle

FICHES TECHNIQUES

CADRE	Chaser 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers, shock mudguard
TAILLES	S: 380mm / M: 420mm / L: 450mm / XL: 490mm
AMORTISSEUR	RockShox Deluxe Select R Debonair, 205x65mm. Settings: Low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
RÉGLAGE DE L'AMORTISSEUR	Light compression, Light rebound, 1 Token
FOURCHE	RockShox 35 Silver TK 29, 160mm, TurnKey, Solo Air, tapered steerer tube, Boost 15x110mm axle, 35mm steel stanchions, 44mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload
JEU DE DIRECTION	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
POTENCE	Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbare
CINTRE	Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbare
POIGNÉES	Onoff Twin, 1lock-on, 135mm
TIGE DE SELLE	Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm
SELLE	Mondraker e-MTB custom design
FREIN AVANT	Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads
FREIN ARRIÈRE	Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads
MANETTES DE FREIN	Sram G2 R, tool-free reach adjust
JANTES	MDK-HP1 27.5+, 35mm internal width, tubeless ready, 32 spokes
RAYONS	CN round stainless steel

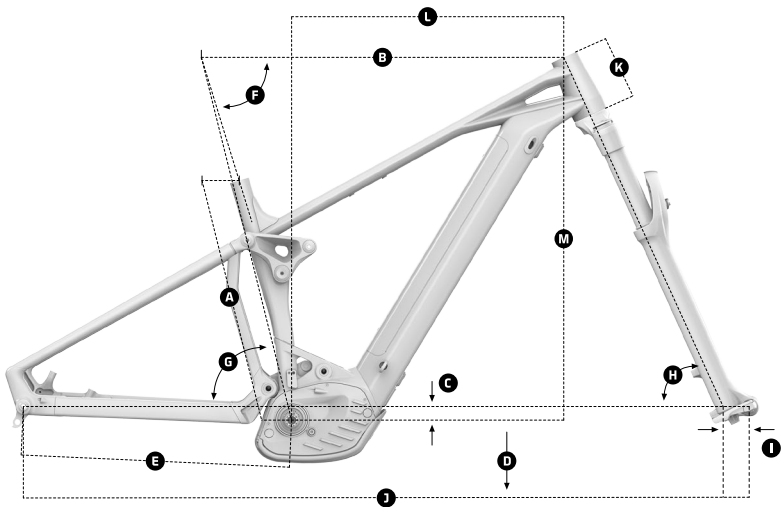

GÉOMÉTRIE

Taille	S	M	L	XL
A Longueur de tube de selle	380 mm	420 mm	450 mm	490 mm
B Longueur de tube supérieur	605 mm	625 mm	650 mm	670 mm
C Déport d'axe de pédalier	-28 mm	-28 mm	-28 mm	-28 mm
D Hauteur de l'axe de pédalier	336 mm	336 mm	336 mm	336 mm
E Longueur de bases	455 mm	455 mm	455 mm	455 mm
F Angle réel de tube de selle	73.5°	73.5°	73.5°	73.5°
G Angle effectif de tube de selle	76°	76°	76°	76°
H Angle de direction	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Empattement	1225 mm	1245 mm	1265 mm	1285 mm
K Longueur de colonne	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm

MODÈLE	COULEUR	S	M	L	XL
Chaser +	Noir / Rouge Flamme / Blanc	010.21221	010.21222	010.21223	010.21224
Chaser +	Rouge Flamme / Noir	010.21229	010.21230	010.21231	010.21232

MOYEU AVANT	Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts
MOYEU ARRIÈRE	Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts
PNEU AVANT	Maxxis Rekon+ 27'5x2.8, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
PNEU ARRIÈRE	Maxxis Rekon+ 27'5x2.8, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
PÉDALIER	Race Face Aeffect ebike, 165mm
PLATEAUX	Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD
PÉDALES	/
CHAÎNE	Sram SX Eagle, 12s, Powerlock
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
SHIFTERS	Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click
CASSETTE	Sram PG-1210, 11-50T, 12s
MOTEUR	Bosch Performance Line CX Cruise (25Km/h) GEN4
BATTERIE	Bosch Powertube 625Wh
DISPLAY	Bosch Purion
PATTE DE DÉRAILLEUR	Mondraker M068
DIVERS	/
POIDS SANS PÉDALES	24.8 kg

PRIME 29

E-MTB TRAIL

3499€



TECHNOLOGIES

FORWARD GEOMETRY
STEALTH SIDE ALLOY STRUCTURE


150 kg SYSTEM WEIGHT

Ø 29"



FICHES TECHNIQUES

CADRE	Prime 6061 Alloy Stealth, Forward Geometry, internal removable battery, tapered head tube, Boost 12x148mm rear axle, integrated dropout speed sensor
TAILLES	XS: 380mm / S: 390mm / M: 430mm / L: 470mm / XL: 510mm
AMORTISSEUR	/
RÉGLAGE DE L'AMORTISSEUR	/
FOURCHE	RockShox Recon Silver RL 29, 120mm, Motion control, Solo Air, tapered steerer tube, Boost 15x110mm axle, 42mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload
JEU DE DIRECTION	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
POTENCE	Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm bar bore
CINTRE	Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm bar bore
POIGNÉES	Onoff Twin, 110mm, 135mm
TIGE DE SELLE	Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 31.6mm, length 400mm
SELLE	Mondraker e-MTB custom design
FREIN AVANT	Sram Level T, 2 piece caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pad
FREIN ARRIÈRE	Sram Level T, 2 piece caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pad
MANETTES DE FREIN	Sram Level T, Direct Link actuation, tool-free reach adjust, lever pivot bushings
JANTES	MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes
RAYONS	CN round stainless steel
MOYEU AVANT	Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts

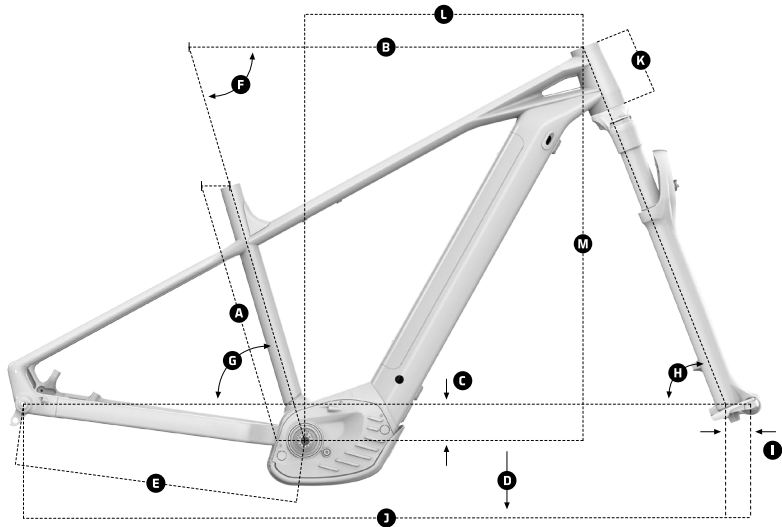

GÉOMÉTRIE

Taille	XS	S	M	L	XL	
A	Longueur de tube de selle	380 mm	390 mm	430 mm	470 mm	510 mm
B	Longueur de tube supérieur	600 mm	615 mm	645 mm	670 mm	700 mm
C	Déport d'axe de pédalier	-60 mm	-60 mm	-60 mm	-60 mm	-60 mm
D	Hauteur de l'axe de pédalier	318 mm	318 mm	318 mm	318 mm	318 mm
E	Longueur de bases	455 mm	455 mm	455 mm	455 mm	455 mm
F	Angle réel de tube de selle	73.5°	73.5°	73.5°	73.5°	73.5°
G	Angle effectif de tube de selle	73.5°	73.5°	73.5°	73.5°	73.5°
H	Angle de direction	69°	69°	69°	69°	69°
I	Fork Offset	51 mm	51 mm	51 mm	51 mm	51 mm
J	Empattement	1138mm	1153 mm	1183 mm	1210 mm	1240 mm
K	Longueur de colonne	110 mm	110 mm	110 mm	130 mm	130 mm
L	Reach	410 mm	425 mm	455 mm	480 mm	505 mm
M	Stack	640 mm	640 mm	640 mm	658 mm	658 mm

MODÈLE	COULEUR	XS	S	M	L	XL
Prime 29	Noir / Blanc / Rouge Flamme	010.21206	010.21207	010.21208	010.21209	010.21210
Prime 29	Noir / Rouge Flamme / Blanc	010.21216	010.21217	010.21218	010.21219	010.21220

MOYEU ARRIÈRE	Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts
PNEU AVANT	Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
PNEU ARRIÈRE	Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
PÉDALIER	Race Face Aeffect ebike, 165mm
PLATEAUX	Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD
PÉDALES	/
CHAINE	Sram SX Eagle, 12s, Powerlock
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
SHIFTERS	Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click
CASSETTE	Sram PG-1210, 11-50T, 12s
MOTEUR	Bosch Performance Line CX Cruise (25Km/h) GEN4
BATTERIE	Bosch Powertube 625Wh
DISPLAY	Bosch Purion
PATTE DE DÉRAILLEUR	Mondraker M068
DIVERS	/
POIDS SANS PÉDALES	21.9 kg

PRIME + E-MTB TRAIL

3499€



TECHNOLOGIES

FORWARD GEOMETRY
STEALTH SIDE ALLOY STRUCTURE


📦 150 kg SYSTEM WEIGHT

Ø 27'5 +



FICHES TECHNIQUES

CADRE	Prime 6061 Alloy Stealth, Forward Geometry, internal removable battery, tapered head tube, Boost 12x148mm rear axle, integrated dropout speed sensor
TAILLES	XS: 380mm / S: 390mm / M: 430mm / L: 470mm / XL: 510mm
AMORTISSEUR	/
RÉGLAGE DE L'AMORTISSEUR	/
FOURCHE	RockShox Recon Silver RL 29, 120mm, Motion control, Solo Air, tapered steerer tube, Boost 15x110mm axle, 42mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload
JEU DE DIRECTION	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
POTENCE	Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm bar bore
CINTRE	Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm bar bore
POIGNÉES	Onoff Twin, 11lock-on, 135mm
TIGE DE SELLE	Onoff Sulfur O-R, 6061 T6 Alloy, 3D forged, diameter 31.6mm, length 400mm
SELLE	Mondraker e-MTB custom design
FREIN AVANT	Sram Level T, 2 piece caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pad
FREIN ARRIÈRE	Sram Level T, 2 piece caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pad
MANETTES DE FREIN	Sram Level T, Direct Link actuation, tooled reach adjust, lever pivot bushings
JANTES	MDK-HP1 27'5+, 35mm internal width, tubeless ready, 32 spokes
RAYONS	CN round stainless steel
MOYEU AVANT	Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts

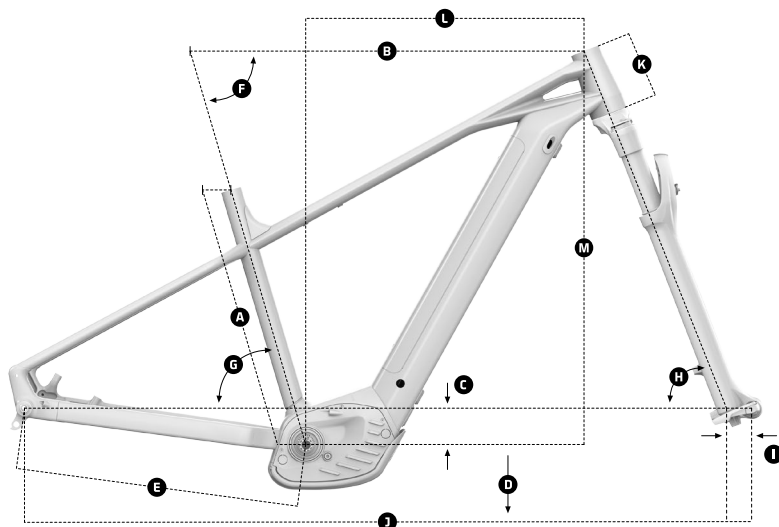

GÉOMÉTRIE

Taille	XS	S	M	L	XL
A Longueur de tube de selle	380 mm	390 mm	430 mm	470 mm	510 mm
B Longueur de tube supérieur	600 mm	615 mm	645 mm	670 mm	700 mm
C Déport d'axe de pédalier	-60 mm	-60 mm	-60 mm	-60 mm	-60 mm
D Hauteur de l'axe de pédalier	305 mm	305 mm	305 mm	305 mm	305 mm
E Longueur de bases	455 mm	455 mm	455 mm	455 mm	455 mm
F Angle réel de tube de selle	73.5°	73.5°	73.5°	73.5°	73.5°
G Angle effectif de tube de selle	73.5°	73.5°	73.5°	73.5°	73.5°
H Angle de direction	69°	69°	69°	69°	69°
I Fork Offset	51 mm	51 mm	51 mm	51 mm	51 mm
J Empattement	1138mm	1153 mm	1183 mm	1210 mm	1240 mm
K Longueur de colonne	110 mm	110 mm	110 mm	130 mm	130 mm
L Reach	410 mm	425 mm	455 mm	480 mm	505 mm
M Stack	640 mm	640 mm	640 mm	658 mm	658 mm

MODÈLE	COULEUR	XS	S	M	L	XL
Prime +	Noir / Blanc / Rouge Flamme	010.21201	010.21202	010.21203	010.21204	010.21205
Prime +	Noir / Rouge Flamme / Blanc	010.21211	010.21212	010.21213	010.21214	010.21215

MOYEU ARRIÈRE	Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts
PNEU AVANT	Maxxis Rekon+ 27'5x2.8, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
PNEU ARRIÈRE	Maxxis Rekon+ 27'5x2.8, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
PÉDALIER	Race Face Aeffect ebike, 165mm
PLATEAUX	Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD
PÉDALES	/
CHAÎNE	Sram SX Eagle, 12s, Powerlock
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
SHIFTERS	Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click
CASSETTE	Sram PG-1210, 11-50T, 12s
MOTEUR	Bosch Performance Line CX Cruise (25Km/h) GEN4
BATTERIE	Bosch Powertube 625Wh
DISPLAY	Bosch Purion
PATTE DE DÉRAILLEUR	Mondraker M068
DIVERS	/
POIDS SANS PÉDALES	21.9 kg

PRIMEX

E-MTB TRAIL

3699€

TECHNOLOGIES

FORWARD GEOMETRY
STEALTH SIDE ALLOY STRUCTURE


150 kg SYSTEM WEIGHT

Ø 29"



FICHES TECHNIQUES

CADRE	Prime 6061 Alloy Stealth, Forward Geometry, internal removable battery, tapered head tube, Boost 12x148mm rear axle, integrated dropout speed sensor
TAILLES	XS: 380mm / S: 390mm / M: 430mm / L: 470mm / XL: 510mm
AMORTISSEUR	/
RÉGLAGE DE L'AMORTISSEUR	/
FOURCHE	RockShox Recon Silver RL 29, 120mm, Motion control, Solo Air, tapered steerer tube, Boost 15x110mm axle, 42mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload
JEU DE DIRECTION	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
POTENCE	MDK Urban 35mm, 6061 forged alloy, 31.8mm barbare
CINTRE	Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbare
POIGNÉES	Onoff Twin, 110mm, 135mm
TIGE DE SELLE	Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 31.6mm, length 400mm
SELLE	Mondraker e-MTB custom design
FREIN AVANT	Sram Level T, 2 piece caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pad
FREIN ARRIÈRE	Sram Level T, 2 piece caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pad
MANETTES DE FREIN	Sram Level T, Direct Link actuation, tooled reach adjust, lever pivot bushings
JANTES	MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes
RAYONS	CN round stainless steel
MOYEU AVANT	Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts

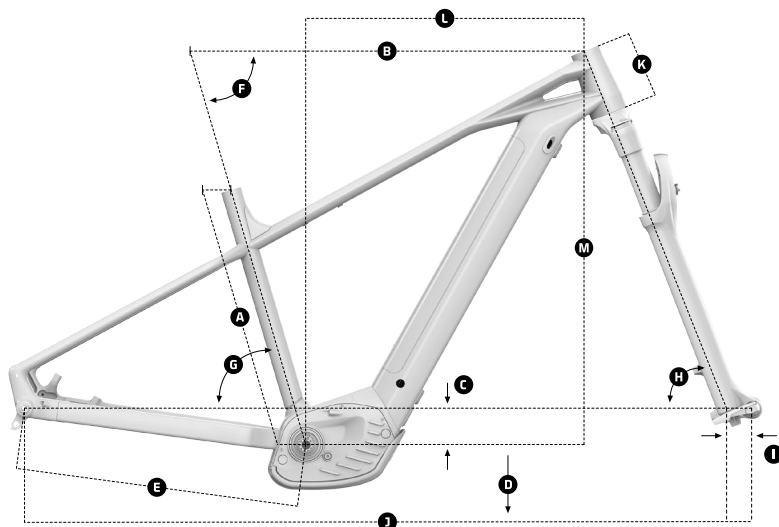

GÉOMÉTRIE

Taille	XS	S	M	L	XL
A Longueur de tube de selle	380 mm	390 mm	430 mm	470 mm	510 mm
B Longueur de tube supérieur	600 mm	615 mm	645 mm	670 mm	700 mm
C Déport d'axe de pédalier	-60 mm	-60 mm	-60 mm	-60 mm	-60 mm
D Hauteur de l'axe de pédalier	318 mm	318 mm	318 mm	318 mm	318 mm
E Longueur de bases	455 mm	455 mm	455 mm	455 mm	455 mm
F Angle réel de tube de selle	73.5°	73.5°	73.5°	73.5°	73.5°
G Angle effectif de tube de selle	73.5°	73.5°	73.5°	73.5°	73.5°
H Angle de direction	69°	69°	69°	69°	69°
I Fork Offset	51 mm	51 mm	51 mm	51 mm	51 mm
J Empattement	1138mm	1153 mm	1183 mm	1210 mm	1240 mm
K Longueur de colonne	110 mm	110 mm	110 mm	130 mm	130 mm
L Reach	410 mm	425 mm	455 mm	480 mm	505 mm
M Stack	640 mm	640 mm	640 mm	658 mm	658 mm

MODÈLE	COULEUR	XS	S	M	L	XL
Prime X	Noir / Bleu Pétrole / Graphite	010.21300	010.21301	010.21302	010.21303	010.21304

MOYEU ARRIÈRE	Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts
PNEU AVANT	Maxxis Gritter 29x2.5, single compound, 60TPI, wire bead
PNEU ARRIÈRE	Maxxis Gritter 29x2.5, single compound, 60TPI, wire bead
PÉDALIER	Race Face Aeffect ebike, 165mm
PLATEAUX	Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD
PÉDALES	/
CHAÎNE	Sram SX Eagle, 12s, Powerlock
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
SHIFTERS	Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click
CASSETTE	Sram PG-1210, 11-50T, 12s
MOTEUR	Bosch Performance Line CX Cruise (25Km/h) GEN4
BATTERIE	Bosch Powertube 625Wh
DISPLAY	Bosch Purion
PATTE DE DÉRAILLEUR	Mondraker M068
DIVERS	Front and rear lights, front and rear fenders, rear rack, kickstand
POIDS SANS PÉDALES	23.3 kg

THUNDRA 29

E-MTB TRAIL

3199€

BATTERIE
EXTERNE OPTIONNELLE



TECHNOLOGIES

FORWARD GEOMETRY
STEALTH SIDE ALLOY STRUCTURE


📦 150 kg SYSTEM WEIGHT

Ø 29"



FICHES TECHNIQUES

CADRE	Thundra 6061 Alloy Stealth, Forward Geometry, integrated internal non-removable battery, tapered head tube, Boost 12x148mm rear axle, integrated dropout speed sensor. *Optional external battery
TAILLES	XS: 380mm / S: 390mm / M: 430mm / L: 470mm / XL: 510mm
AMORTISSEUR	/
RÉGLAGE DE L'AMORTISSEUR	/
FOURCHE	RockShox Recon Silver RL 29, 120mm, Motion control, Solo Air, tapered steerer tube, Boost 15x110mm axle, 42mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload
JEU DE DIRECTION	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
POTENCE	Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbare
CINTRE	Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbare
POIGNÉES	Onoff Twin, 1lock-on, 135mm
TIGE DE SELLE	Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 31.6mm, length 400mm
SELLE	Mondraker e-MTB custom design
FREIN AVANT	Shimano MT201, RT66 203mm IS 6 bolts rotor, resin pads
FREIN ARRIÈRE	Shimano MT201, RT66 180mm IS 6 bolts rotor, resin pads
MANETTES DE FREIN	Shimano MT201, tooled reach adjust
JANTES	MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes
RAYONS	CN round stainless steel

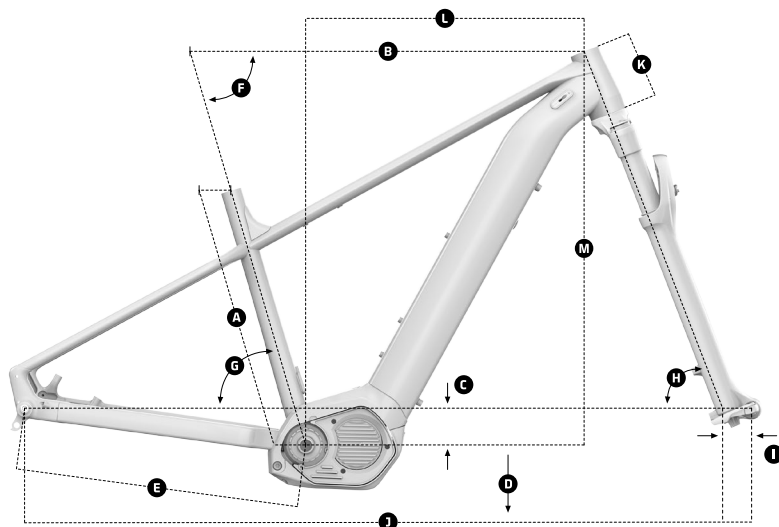

GÉOMÉTRIE

Taille	XS	S	M	L	XL
A Longueur de tube de selle	380 mm	390 mm	430 mm	470 mm	510 mm
B Longueur de tube supérieur	600 mm	615 mm	645 mm	670 mm	700 mm
C Déport d'axe de pédalier	-60 mm	-60 mm	-60 mm	-60 mm	-60 mm
D Hauteur de l'axe de pédalier	317 mm	317 mm	317 mm	317 mm	317 mm
E Longueur de bases	455 mm	455 mm	455 mm	455 mm	455 mm
F Angle réel de tube de selle	73.5°	73.5°	73.5°	73.5°	73.5°
G Angle effectif de tube de selle	73.5°	73.5°	73.5°	73.5°	73.5°
H Angle de direction	69°	69°	69°	69°	69°
I Fork Offset	51 mm	51 mm	51 mm	51 mm	51 mm
J Empattement	1138mm	1153 mm	1183 mm	1210 mm	1240 mm
K Longueur de colonne	110 mm	110 mm	110 mm	130 mm	130 mm
L Reach	410 mm	425 mm	455 mm	480 mm	505 mm
M Stack	640 mm	640 mm	640 mm	658 mm	658 mm

MODÈLE	COULEUR	XS	S	M	L	XL
Thundra 29	Argent Racing / Rouge Flamme / Noir	010.21290	010.21291	010.21292	010.21293	010.21294

MOYEU AVANT	Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts
MOYEU ARRIÈRE	Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts
PNEU AVANT	Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
PNEU ARRIÈRE	Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
PÉDALIER	Shimano STEPS E8000, 165mm
PLATEAUX	Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD
PÉDALES	/
CHAÎNE	Sram SX Eagle, 12s, Powerlock
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
SHIFTERS	Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click
CASSETTE	Sram PG-1210, 11-50T, 12s
MOTEUR	Shimano STEPS E7000
BATTERIE	Simplo internal 630Wh
DISPLAY	Shimano STEPS E5000
PATTE DE DÉRAILLEUR	Mondraker M068
DIVERS	*Optional external battery: Simplo 360Wh
POIDS SANS PÉDALES	22.0 kg

THUNDRA + E-MTB TRAIL

3349€

BATTERIE
EXTERNE OPTIONNELLE



TECHNOLOGIES

FORWARD GEOMETRY
STEALTH SIDE ALLOY STRUCTURE

📦 150 kg SYSTEM WEIGHT


Ø 27'5 +



① Le diamètre des roues qui figurent sur cette image ne correspond pas à ce modèle

FICHES TECHNIQUES

CADRE	Thundra 6061 Alloy Stealth, Forward Geometry, integrated internal non-removable battery, tapered head tube, Boost 12x148mm rear axle, integrated dropout speed sensor. *Optional external battery
TAILLES	XS: 380mm / S: 390mm / M: 430mm / L: 470mm / XL: 510mm
AMORTISSEUR	/
RÉGLAGE DE L'AMORTISSEUR	/
FOURCHE	RockShox Recon Silver RL 29, 120mm, Motion control, Solo Air, tapered steerer tube, Boost 15x110mm axle, 42mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload
JEU DE DIRECTION	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
POTENCE	Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbare
CINTRE	Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbare
POIGNÉES	Onoff Twin, 1lock-on, 135mm
TIGE DE SELLE	Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 31.6mm, length 400mm
SELLE	Mondraker e-MTB custom design
FREIN AVANT	Shimano MT201, RT66 203mm IS 6 bolts rotor, resin pads
FREIN ARRIÈRE	Shimano MT201, RT66 180mm IS 6 bolts rotor, resin pads
MANETTES DE FREIN	Shimano MT201, tooled reach adjust
JANTES	MDK-HP1 27'5+, 35mm internal width, tubeless ready, 32 spokes
RAYONS	CN round stainless steel

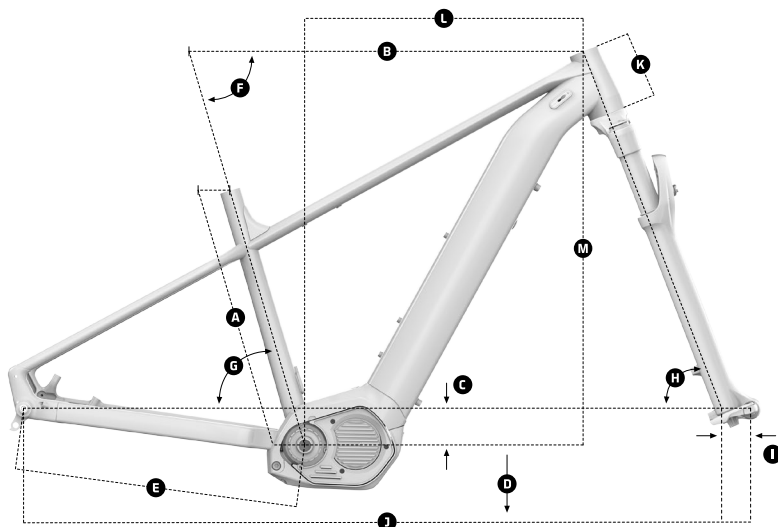

GÉOMÉTRIE

Taille	XS	S	M	L	XL
A Longueur de tube de selle	380 mm	390 mm	430 mm	470 mm	510 mm
B Longueur de tube supérieur	600 mm	615 mm	645 mm	670 mm	700 mm
C Déport d'axe de pédalier	-60 mm	-60 mm	-60 mm	-60 mm	-60 mm
D Hauteur de l'axe de pédalier	305 mm	305 mm	305 mm	305 mm	305 mm
E Longueur de bases	455 mm	455 mm	455 mm	455 mm	455 mm
F Angle réel de tube de selle	73.5°	73.5°	73.5°	73.5°	73.5°
G Angle effectif de tube de selle	73.5°	73.5°	73.5°	73.5°	73.5°
H Angle de direction	69°	69°	69°	69°	69°
I Fork Offset	51 mm	51 mm	51 mm	51 mm	51 mm
J Empattement	1138mm	1153 mm	1183 mm	1210 mm	1240 mm
K Longueur de colonne	110 mm	110 mm	110 mm	130 mm	130 mm
L Reach	410 mm	425 mm	455 mm	480 mm	505 mm
M Stack	640 mm	640 mm	640 mm	658 mm	658 mm

MODÈLE	COULEUR	XS	S	M	L	XL
Thundra +	Argent Racing / Rouge Flamme / Noir	010.21285	010.21286	010.21287	010.21288	010.21289

MOYEU AVANT	Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts
MOYEU ARRIÈRE	Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts
PNEU AVANT	Maxxis Rekon+ 27'5x2.8, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
PNEU ARRIÈRE	Maxxis Rekon+ 27'5x2.8, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
PÉDALIER	Shimano STEPS E8000, 165mm
PLATEAUX	Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD
PÉDALES	/
CHAÎNE	Sram SX Eagle, 12s, Powerlock
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
SHIFTERS	Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click
CASSETTE	Sram PG-1210, 11-50T, 12s
MOTEUR	Shimano STEPS E7000
BATTERIE	Simplo internal 630Wh
DISPLAY	Shimano STEPS E5000
PATTE DE DÉRAILLEUR	Mondraker M068
DIVERS	*Optional external battery: Simplo 360Wh
POIDS SANS PÉDALES	22.0 kg

THUNDRA X

E-MTB TRAIL

3349€

BATTERIE
EXTERNE OPTIONNELLE



TECHNOLOGIES

FORWARD GEOMETRY
STEALTH SIDE ALLOY STRUCTURE


150 kg SYSTEM WEIGHT

Ø 29"



FICHES TECHNIQUES

CADRE	Thundra 6061 Alloy Stealth, Forward Geometry, integrated internal non-removable battery, tapered head tube, Boost 12x148mm rear axle, integrated dropout speed sensor. *Optional external battery
TAILLES	XS: 380mm / S: 390mm / M: 430mm / L: 470mm / XL: 510mm
AMORTISSEUR	/
RÉGLAGE DE L'AMORTISSEUR	/
FOURCHE	RockShox Recon Silver RL 29, 120mm, Motion control, Solo Air, tapered steerer tube, Boost 15x110mm axle, 42mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload
JEU DE DIRECTION	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
POTENCE	MDK Urban 35mm, 6061 forged alloy, 31.8mm barbare
CINTRE	Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbare
POIGNÉES	Onoff Twin, 1lock-on, 135mm
TIGE DE SELLE	Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 31.6mm, length 400mm
SELLE	Mondraker e-MTB custom design
FREIN AVANT	Shimano MT201, RT66 203mm IS 6 bolts rotor, resin pads
FREIN ARRIÈRE	Shimano MT201, RT66 180mm IS 6 bolts rotor, resin pads
MANETTES DE FREIN	Shimano MT201, tooled reach adjust
JANTES	MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes
RAYONS	CN round stainless steel

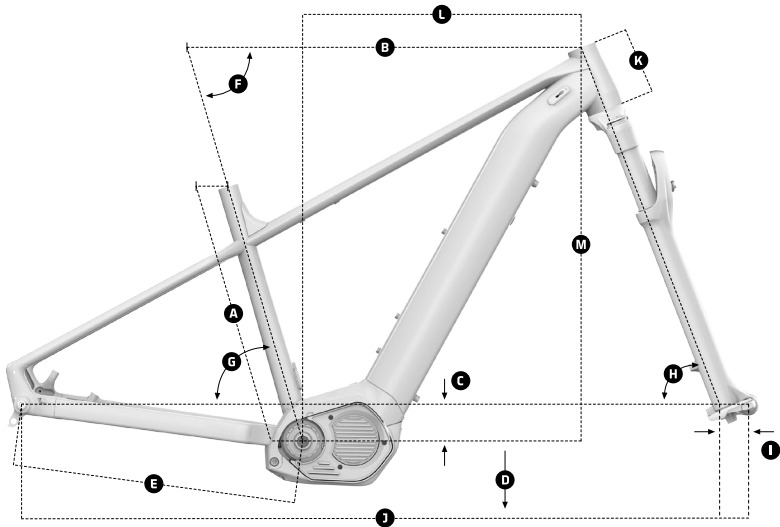

GÉOMÉTRIE

Taille	XS	S	M	L	XL	
A	Longueur de tube de selle	380 mm	390 mm	430 mm	470 mm	510 mm
B	Longueur de tube supérieur	600 mm	615 mm	645 mm	670 mm	700 mm
C	Déport d'axe de pédalier	-60 mm	-60 mm	-60 mm	-60 mm	-60 mm
D	Hauteur de l'axe de pédalier	317 mm	317 mm	317 mm	317 mm	317 mm
E	Longueur de bases	455 mm	455 mm	455 mm	455 mm	455 mm
F	Angle réel de tube de selle	73.5°	73.5°	73.5°	73.5°	73.5°
G	Angle effectif de tube de selle	73.5°	73.5°	73.5°	73.5°	73.5°
H	Angle de direction	69°	69°	69°	69°	69°
I	Fork Offset	51 mm	51 mm	51 mm	51 mm	51 mm
J	Empattement	1138mm	1153 mm	1183 mm	1210 mm	1240 mm
K	Longueur de colonne	110 mm	110 mm	110 mm	130 mm	130 mm
L	Reach	410 mm	425 mm	455 mm	480 mm	505 mm
M	Stack	640 mm	640 mm	640 mm	658 mm	658 mm

MODÈLE	COULEUR	XS	S	M	L	XL
Thundra X	Graphite / Noir	010.21305	010.21306	010.21307	010.21308	010.21309

MOYEU AVANT	Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts
MOYEU ARRIÈRE	Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts
PNEU AVANT	Maxxis Grifter 29x2.5, single compound, 60TPI, wire bead
PNEU ARRIÈRE	Maxxis Grifter 29x2.5, single compound, 60TPI, wire bead
PÉDALIER	Shimano STEPS E8000, 165mm
PLATEAUX	Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD
PÉDALES	/
CHAÎNE	Sram SX Eagle, 12s, Powerlock
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
SHIFTERS	Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click
CASSETTE	Sram PG-1210, 11-50T, 12s
MOTEUR	Shimano STEPS E7000
BATTERIE	Simplo internal 630Wh
DISPLAY	Shimano STEPS E5000
PATTE DE DÉRAILLEUR	Mondraker M068
DIVERS	Front and rear lights, front and rear fenders, rear rack, kickstand. *Optional external battery: Simplo 360Wh
POIDS SANS PÉDALES	23.9 kg

F-PLAY 26

E-KIDS

2999€

TECHNOLOGIES


FORWARD GEOMETRY
ZERO SUSPENSION SYSTEM
STEALTH SIDE ALLOY STRUCTURE

Ø 26"



FICHES TECHNIQUES

CADRE	F-Play 26 6061 Alloy Stealth evo, hydroformed tubing, Zero Suspension System, 120mm travel, Forward Geometry, one piece bolt-on upper link, integrated internal non-removable battery, Tapered head tube, HHG internal cable routing, BSA bottom bracket, QR 9mm rear axle, 1x drivetrain compatible
TAILLES	One size: 350mm
AMORTISSEUR	X-Fusion O2PRO R, 210x55mm. Settings: low-speed rebound, air preload. 45x8mm top and bottom bushings
RÉGLAGE DE L'AMORTISSEUR	A-Tune light compression
FOURCHE	X-Fusion Velvet RL2 26, 120mm, Motion control, air spring, tapered steerer tube, 9x135mm axle, 32mm aluminum stanchions, 41mm offset. Settings: lockout, rebound, air preload
JEU DE DIRECTION	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
POTENCE	MDK XC, 6061 forged alloy, 31.8mm barbare, rise: 0°, length: 35mm
CINTRE	MDK XC 1.0, 6061 alloy, rise: 25mm, width: 680mm, 9° backsweep, 5° upsweep, 31.8mm barbare
POIGNÉES	Onoff Twin, 1lock-on, 135mm
TIGE DE SELLE	MDK XC 0-R, 6061 T6 Alloy, diameter 31.6mm, length 350mm
SELLE	SDG Fly JR
FREIN AVANT	Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad
FREIN ARRIÈRE	Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad
MANETTES DE FREIN	Sram Level, tooled reach adjust, lever pivot bushings
JANTES	MDK-XP1 26 TLR, 23mm internal width, tubeless ready, 32 spokes
RAYONS	CN round stainless steel
MOYEU AVANT	Formula DC20LW, 9x135mm, cup & cone ball bearings, IS 6 bolts

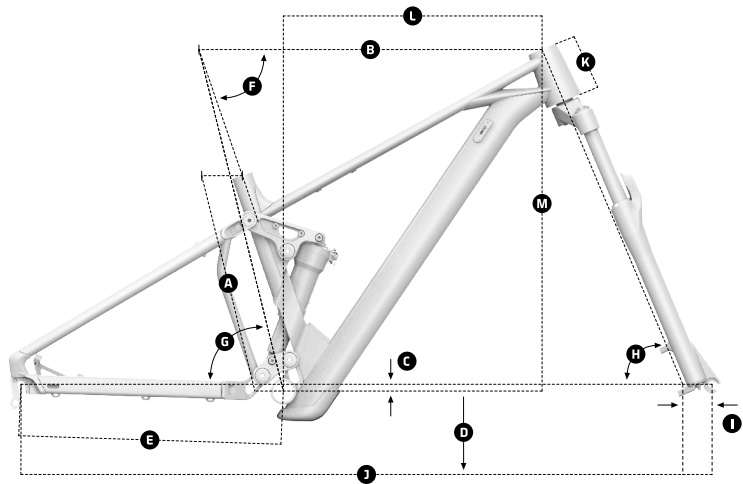

GÉOMÉTRIE

Taille	26"	
A	Longueur de tube de selle	350 mm
B	Longueur de tube supérieur	550 mm
C	Déport d'axe de pédalier	-10 mm
D	Hauteur de l'axe de pédalier	320 mm
E	Longueur de bases	420 mm
F	Angle réel de tube de selle	71°
G	Angle effectif de tube de selle	76°
H	Angle de direction	67°
I	Fork Offset	41 mm
J	Empattement	1104 mm
K	Longueur de colonne	90 mm
L	Reach	415 mm
M	Stack	545 mm

MODÈLE	COULEUR	26"
F-Play 26	Argent Racing / Rouge Flamme / Noir	010.21325

MOYEU ARRIÈRE	Mahle-Ebikemotion X-35
PNEU AVANT	Kenda Booster 26x2.4 single compound 30TPI, wire bead
PNEU ARRIÈRE	Kenda Booster 26x2.4 single compound 30TPI, wire bead
PÉDALIER	Sram SX Eagle, DUB axle, Direct mount chain ring, 155mm
PLATEAUX	30T, steel, X-Sync
BOITIER DE PÉDALIER	Sram DUB BSA, sealed bearings, 73mm
PÉDALES	/
CHAINE	Sram SX Eagle, 12s, Powerlock
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
SHIFTERS	Sram Trigger SX Eagle, 12s, X-Actuation 1:1
CASSETTE	Sram PG-1230, 11-50T, 12s
MOTEUR	Mahle-Ebikemotion X-35
BATTERIE	Mahle-Ebikemotion Internal 250Wh
DISPLAY	Mahle-Ebikemotion
PATTE DE DÉRAILLEUR	Mondraker M073
DIVERS	/
POIDS SANS PÉDALES	16.4 kg

F-PLAY 24

E-KIDS

2699€

TECHNOLOGIES


FORWARD GEOMETRY
ZERO SUSPENSION SYSTEM
STEALTH SIDE ALLOY STRUCTURE

Ø 24"



FICHES TECHNIQUES

CADRE	F-Play 24 6061 Alloy Stealth evo, hydroformed tubing, Zero Suspension System, 120mm travel, Forward Geometry, one piece bolt-on upper link, integrated internal non-removable battery, Tapered head tube, HHG internal cable routing, BSA bottom bracket, QR 9mm rear axle, 1x drivetrain compatible
TAILLES	One size: 300mm
AMORTISSEUR	SR Suntour Raidon R, 210x47.5mm. Settings: low-speed rebound, air preload. 45x8mm top and bottom bushings
RÉGLAGE DE L'AMORTISSEUR	/
FOURCHE	RockShox Judy Silver TK 26, 100mm, TurnKey, Solo Air, tapered steerer tube, 9x135mm axle, 30mm steel stanchions, 40mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload
JEU DE DIRECTION	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
POTENCE	MDK XC, 6061 forged alloy, 31.8mm barbare, rise: 0°, length: 35mm
CINTRE	MDK XC 1.0, 6061 alloy, rise: 25mm, width: 680mm, 9° backsweep, 5° upsweep, 31.8mm barbare
POIGNÉES	Onoff Twin, 1lock-on, 135mm
TIGE DE SELLE	MDK XC 0-R, 6061 T6 Alloy, diameter 31.6mm, length 300mm
SELLE	SDG Fly JR
FREIN AVANT	Tektro Auriga HDM291 hydraulic, 160mm IS 6 bolts rotor
FREIN ARRIÈRE	Tektro Auriga HDM291 hydraulic, 160mm IS 6 bolts rotor
MANETTES DE FREIN	Tektro Auriga HDM291 hydraulic
JANTES	MDK-XP1 24 TLR, 23mm internal width, tubeless ready, 32 spokes
RAYONS	CN round stainless steel
MOYEU AVANT	Formula DC20LW, 9x135mm, cup & cone ball bearings, IS 6 bolts

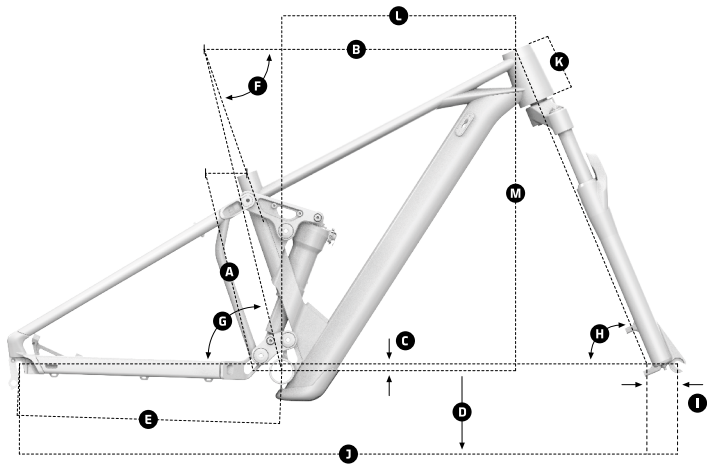

GÉOMÉTRIE

Taille	24"	
A	Longueur de tube de selle	320 mm
B	Longueur de tube supérieur	525 mm
C	Déport d'axe de pédalier	-10 mm
D	Hauteur de l'axe de pédalier	295 mm
E	Longueur de bases	420 mm
F	Angle réel de tube de selle	71°
G	Angle effectif de tube de selle	76°
H	Angle de direction	67°
I	Fork Offset	40 mm
J	Empattement	1050 mm
K	Longueur de colonne	90 mm
L	Reach	375 mm
M	Stack	513 mm

MODÈLE	COULEUR	24"
F-Play 24	Noir / Bleu Ciel / Rouge Flamme	010.21324

MOYEU ARRIÈRE	Mahle-Ebikemotion X-35
PNEU AVANT	Kenda Booster 24x2.4 single compound 30TPI, wire bead
PNEU ARRIÈRE	Kenda Booster 24x2.4 single compound 30TPI, wire bead
PÉDALIER	Samox, Direct mount chain ring, 155mm
PLATEAUX	30T, steel
BOITIER DE PÉDALIER	Samox BSA, 73mm
PÉDALES	/
CHAINE	Sram PC1031 10s, Powerlock
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Sram GX, 10s, short cage, X-actuation 1:1
SHIFTERS	Sram trigger GX 10s, X-actuation 1:1
CASSETTE	Sram PG 1020 11-36T, 10s
MOTEUR	Mahle-Ebikemotion X-35
BATTERIE	Mahle-Ebikemotion Internal 250Wh
DISPLAY	Mahle-Ebikemotion
PATTE DE DÉRAILLEUR	Mondraker M073
DIVERS	/
POIDS SANS PÉDALES	16.4 kg

PLAY 26

E-KIDS

2299€

TECHNOLOGIES


FORWARD GEOMETRY
STEALTH SIDE ALLOY STRUCTURE

Ø 26"



FICHES TECHNIQUES

CADRE	Play 26 6061 Alloy Stealth evo, Forward Geometry, hydroformed tubing, integrated internal non-removable battery, Tapered head tube, HHG internal cable routing, BSA bottom bracket, QR 9mm rear axle, 1x drivetrain compatible
TAILLES	One size: 350mm
AMORTISSEUR	/
RÉGLAGE DE L'AMORTISSEUR	/
FOURCHE	RockShox Judy Silver TK 26, 100mm, TurnKey, Solo Air, tapered steerer tube, 9x135mm axle, 30mm steel stanchions, 40mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload
JEU DE DIRECTION	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
POTENCE	MDK XC, 6061 forged alloy, 31.8mm barbare, rise: 0°, length: 35mm
CINTRE	MDK XC 1.0, 6061 alloy, rise: 25mm, width: 650mm, 9° backsweep, 5° upsweep, 31.8mm barbare
POIGNÉES	Onoff Twin, 1lock-on, 135mm
TIGE DE SELLE	MDK XC 0-R, 6061 T6 Alloy, diameter 31.6mm, length 350mm
SELLE	SDG Fly JR
FREIN AVANT	Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad
FREIN ARRIÈRE	Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad
MANETTES DE FREIN	Sram Level, tooled reach adjust, lever pivot bushings
JANTES	MDK-XP1 26 TLR, 23mm internal width, tubeless ready, 32 spokes
RAYONS	CN round stainless steel
MOYEU AVANT	Formula DC20LW, 9x135mm, cup & cone ball bearings, IS 6 bolts

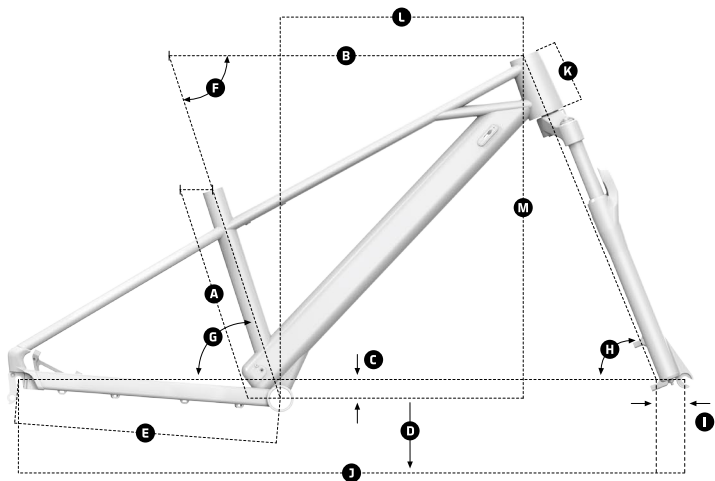

GÉOMÉTRIE

Taille	26"	
A	Longueur de tube de selle	350 mm
B	Longueur de tube supérieur	567 mm
C	Déport d'axe de pédalier	-30 mm
D	Hauteur de l'axe de pédalier	300 mm
E	Longueur de bases	420 mm
F	Angle réel de tube de selle	72°
G	Angle effectif de tube de selle	72°
H	Angle de direction	68°
I	Fork Offset	40 mm
J	Empattement	1060 mm
K	Longueur de colonne	100 mm
L	Reach	390 mm
M	Stack	546 mm

MODÈLE	COULEUR	26"
Play 26	Noir / Rouge Flamme / Blanc	010.21323

MOYEU ARRIÈRE	Mahle-Ebikemotion X-35
PNEU AVANT	Kenda Booster 26x2.4 single compound 30TPI, wire bead
PNEU ARRIÈRE	Kenda Booster 26x2.4 single compound 30TPI, wire bead
PÉDALIER	Samox, Direct mount chain ring, 155mm
PLATEAUX	30T, steel
BOITIER DE PÉDALIER	Samox BSA, 73mm
PÉDALES	/
CHAINE	Sram PC1110 11s, Powerlock
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Sram NX, 11s, long cage, X-actuation 1:1
SHIFTERS	Sram trigger NX 11s, X-actuation 1:1
CASSETTE	Sram PG 1030 11-42T, 11s
MOTEUR	Mahle-Ebikemotion X-35
BATTERIE	Mahle-Ebikemotion Internal 250Wh
DISPLAY	Mahle-Ebikemotion
PATTE DE DÉRAILLEUR	Mondraker M073
DIVERS	/
POIDS SANS PÉDALES	15.8 kg

PLAY 24

E-KIDS

2199€

TECHNOLOGIES


FORWARD GEOMETRY
STEALTH SIDE ALLOY STRUCTURE

Ø 24"



FICHES TECHNIQUES

CADRE	Play 24 6061 Alloy Stealth evo, Forward Geometry, hydroformed tubing, integrated internal non-removable battery, Tapered head tube, HHG internal cable routing, BSA bottom bracket, QR 9mm rear axle, 1x drivetrain compatible
TAILLES	One size: 320mm
AMORTISSEUR	/
RÉGLAGE DE L'AMORTISSEUR	/
FOURCHE	RockShox Judy Silver TK 26, 100mm, TurnKey, Solo Air, tapered steerer tube, 9x135mm axle, 30mm steel stanchions, 40mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload
JEU DE DIRECTION	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
POTENCE	MDK XC, 6061 forged alloy, 31.8mm barbare, rise: 0°, length: 35mm
CINTRE	MDK XC 1.0, 6061 alloy, rise: 25mm, width: 580mm, 9° backsweep, 5° upsweep, 31.8mm barbare
POIGNÉES	Onoff Twin, 1lock-on, 135mm
TIGE DE SELLE	MDK XC 0-R, 6061 T6 Alloy, diameter 31.6mm, length 300mm
SELLE	SDG Fly JR
FREIN AVANT	Tektro Auriga HDM291 hydraulic, 160mm IS 6 bolts rotor
FREIN ARRIÈRE	Tektro Auriga HDM291 hydraulic, 160mm IS 6 bolts rotor
MANETTES DE FREIN	Tektro Auriga HDM291 hydraulic
JANTES	MDK-XP1 24 TLR, 23mm internal width, tubeless ready, 32 spokes
RAYONS	CN round stainless steel
MOYEU AVANT	Formula DC20LW, 9x135mm, cup & cone ball bearings, IS 6 bolts

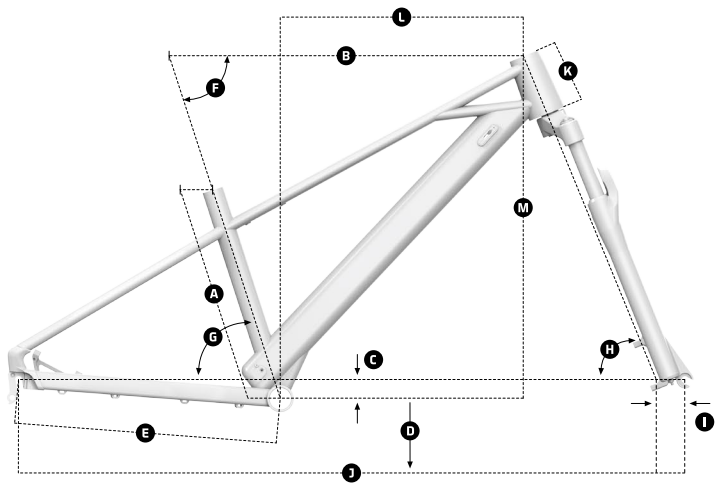

GÉOMÉTRIE

Taille	24"	
A	Longueur de tube de selle	320 mm
B	Longueur de tube supérieur	517 mm
C	Déport d'axe de pédalier	-30 mm
D	Hauteur de l'axe de pédalier	280 mm
E	Longueur de bases	405 mm
F	Angle réel de tube de selle	72°
G	Angle effectif de tube de selle	72°
H	Angle de direction	68°
I	Fork Offset	40 mm
J	Empattement	994 mm
K	Longueur de colonne	100 mm
L	Reach	350 mm
M	Stack	537 mm

MODÈLE	COULEUR	24"
Play 24	Rouge Flamme / Noir / Blanc	010.21322

MOYEU ARRIÈRE	Mahle-Ebikemotion X-35
PNEU AVANT	Kenda Booster 24x2.4 single compound 30TPI, wire bead
PNEU ARRIÈRE	Kenda Booster 24x2.4 single compound 30TPI, wire bead
PÉDALIER	Samox, Direct mount chain ring, 155mm
PLATEAUX	28T, steel
BOITIER DE PÉDALIER	Samox BSA, 73mm
PÉDALES	/
CHAÎNE	Sram PC1110 11s, Powerlock
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Sram NX, 11s, long cage, X-actuation 1:1
SHIFTERS	Sram trigger NX 11s, X-actuation 1:1
CASSETTE	Sram PG 1030 11-42T, 11s
MOTEUR	Mahle-Ebikemotion X-35
BATTERIE	Mahle-Ebikemotion Internal 250Wh
DISPLAY	Mahle-Ebikemotion
PATTE DE DÉRAILLEUR	Mondraker M073
DIVERS	/
POIDS SANS PÉDALES	15.1 kg

PLAY 20

E-KIDS

1999€

TECHNOLOGIES


FORWARD GEOMETRY
STEALTH SIDE ALLOY STRUCTURE

Ø 20"



FICHES TECHNIQUES

CADRE	Play 20 6061 Alloy Stealth evo, Forward Geometry, hydroformed tubing, integrated internal non-removable battery, Tapered head tube, HHG internal cable routing, BSA bottom bracket, QR 9mm rear axle, 1x drivetrain compatible
TAILLES	One size: 260mm
AMORTISSEUR	/
RÉGLAGE DE L'AMORTISSEUR	/
FOURCHE	MDK 20 Kid, Rigid alloy Stealth stanchions, Post Mount disc brake mount
JEU DE DIRECTION	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
POTENCE	MDK XC, 6061 forged alloy, 31.8mm barbare, rise: 0°, length: 35mm
CINTRE	MDK XC 1.0, 6061 alloy, rise: 25mm, width: 580mm, 9° backsweep, 5° upsweep, 31.8mm barbare
POIGNÉES	Kids
TIGE DE SELLE	Pivotal
SELLE	MDK Kids series
FREIN AVANT	Tektro Auriga HDM291 hydraulic, 160mm IS 6 bolts rotor
FREIN ARRIÈRE	Tektro Auriga HDM291 hydraulic, 160mm IS 6 bolts rotor
MANETTES DE FREIN	Tektro Auriga HDM291 hydraulic
JANTES	MDK-XP1 20 TLR, 23mm internal width, tubeless ready, 32 spokes
RAYONS	CN round stainless steel
MOYEU AVANT	Formula DC20LW, 9x135mm, cup & cone ball bearings, IS 6 bolts

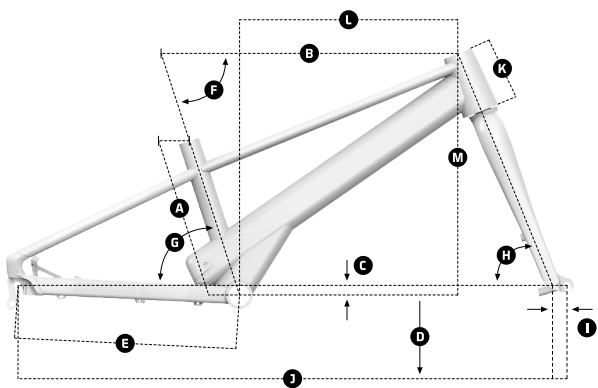

GÉOMÉTRIE

Taille	20"	
A	Longueur de tube de selle	260 mm
B	Longueur de tube supérieur	475 mm
C	Déport d'axe de pédalier	-15 mm
D	Hauteur de l'axe de pédalier	240 mm
E	Longueur de bases	355 mm
F	Angle réel de tube de selle	72°
G	Angle effectif de tube de selle	72°
H	Angle de direction	68°
I	Fork Offset	40 mm
J	Empattement	903 mm
K	Longueur de colonne	100 mm
L	Reach	340 mm
M	Stack	387 mm

MODÈLE	COULEUR	20"
Play 20	Jaune / Bleu Foncé	010.21321

MOYEU ARRIÈRE	Mahle-Ebikemotion X-35
PNEU AVANT	Kenda Booster 20x2.4 single compound 30TPI, wire bead
PNEU ARRIÈRE	Kenda Booster 20x2.4 single compound 30TPI, wire bead
PÉDALIER	Samox, Direct mount chain ring, 155mm
PLATEAUX	28T, steel
BOITIER DE PÉDALIER	Samox BSA, 73mm
PÉDALES	/
CHAINE	Sram PC951 9s, Powerlock
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	Sram X4, 9s, medium cage, X-actuation 1:1
SHIFTERS	Sram trigger X5 9s, X-actuation 1:1
CASSETTE	Sram PG 920 11-34T, 9s
MOTEUR	Mahle-Ebikemotion X-35
BATTERIE	Mahle-Ebikemotion Internal 250Wh
DISPLAY	Mahle-Ebikemotion
PATTE DE DÉRAILLEUR	Mondraker M073
DIVERS	/
POIDS SANS PÉDALES	12.9 kg

GROMMY 16

E-KIDS

799€

TECHNOLOGIES


STEALTH SIDE ALLOY STRUCTURE

Ø 16"



FICHES TECHNIQUES

CADRE	Grommy 16 6061 Alloy Stealth evo, HHG internal cable routing, Resin footrest, Resin motor cover, Resin chain protector, Post mount disc brake mount
TAILLES	One size: 250mm
AMORTISSEUR	/
RÉGLAGE DE L'AMORTISSEUR	/
FOURCHE	MDK 16 Kid, Rigid alloy Stealth stanchions, Post Mount disc brake mount
JEU DE DIRECTION	FPD CHEX-1089, Internal ZS, 44/50 upper and lower cup
POTENCE	MDK, 6061 melt forged alloy, 25.4mm barbare, rise: 0°, length: 30mm
CINTRE	MDK 1.0, 6061 alloy, rise: 25mm, width: 500mm, 9° backsweep, 5° upsweep, 25.4mm barbare
POIGNÉES	Kids
TIGE DE SELLE	Pivotal
SELLE	MDK Kids series
FREIN AVANT	/
FREIN ARRIÈRE	Tektro MD-510 Mechanical hydraulic, flat mount caliper, 140mm IS 6 bolts rotor
MANETTES DE FREIN	Tektro JL-350RS kids specific alloy 4 fingers
JANTES	MDK-Push 16, alloy 21mm internal width, 28 spokes
RAYONS	CN round stainless steel black
MOYEU AVANT	KT K88F 9x100mm cup&cone ball bearings 6 bolts
MOYEU ARRIÈRE	KT TV-3R 9x110mm cup&cone ball bearings

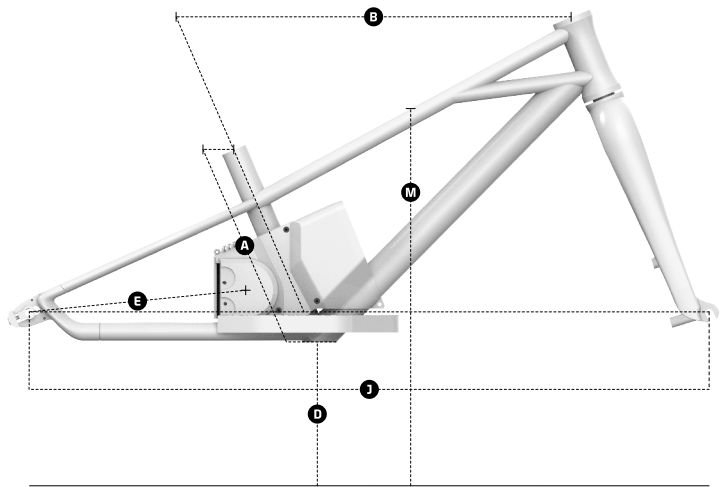

GÉOMÉTRIE

Taille	16"	
A	Longueur de tube de selle	215 mm
B	Longueur de tube supérieur	465mm
C	Déport d'axe de pédalier	/
D	Hauteur de l'axe de pédalier	180 mm
E	Longueur de bases	340 mm
F	Angle réel de tube de selle	/
G	Angle effectif de tube de selle	/
H	Angle de direction	/
I	Fork Offset	/
J	Empattement	810 mm
K	Longueur de colonne	/
L	Reach	/
M	Stand Over	400 mm

MODÈLE	COULEUR	16"
Grommy 16	Noir / Bleu Ciel / Rouge Flamme	010.21354

PNEU AVANT	Vee Tire Crown Gem 16x2.25 27TPI Wired Bead
PNEU ARRIÈRE	Vee Tire Crown Gem 16x2.25 27TPI Wired Bead
PÉDALIER	/
PLATEAUX	10T, steel
BOITIER DE PÉDALIER	/
PÉDALES	/
CHAÎNE	KMC Z33 Half Link, 1 speed.
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	/
SHIFTERS	/
CASSETTE	DNP freewheel 16T
MOTEUR	MDK brushless 250w Outoput
BATTERIE	MDK 4Ah 80Wh
DISPLAY	MDK LED Throttle 3speed postition, battery range
PATTE DE DÉRAILLEUR	/
DIVERS	/
POIDS SANS PÉDALES	8.5 kg

GROMMY 12

E-KIDS

749€

TECHNOLOGIES


STEALTH SIDE ALLOY STRUCTURE

Ø 12"



FICHES TECHNIQUES

CADRE	Grommy 12 6061 Alloy Stealth evo, HHG internal cable routing, Resin footrest, Resin motor cover, Resin chain protector, Post mount disc brake mount
TAILLES	One size: 190mm
AMORTISSEUR	/
RÉGLAGE DE L'AMORTISSEUR	/
FOURCHE	MDK 12 Kid, Rigid alloy Stealth stanchions.
JEU DE DIRECTION	FPD CHEX-1089, Internal ZS, 44/50 upper and lower cup
POTENCE	MDK, 6061 melt forged alloy, 25.4mm barbare, rise: 0°, length: 30mm
CINTRE	MDK 1.0, 6061 alloy, rise: 25mm, width: 500mm, 9° backsweep, 5° upsweep, 25.4mm barbare
POIGNÉES	Kids
TIGE DE SELLE	One piece Push
SELLE	MDK Kids series
FREIN AVANT	/
FREIN ARRIÈRE	Tektro MD-510 Mechanical hydraulic, flat mount caliper, 140mm IS 6 bolts rotor
MANETTES DE FREIN	Tektro JL-350RS kids specific alloy 4 fingers
JANTES	MDK-Push 12, alloy 21mm internal width, 28 spokes
RAYONS	CN round stainless steel black
MOYEU AVANT	KT K88F 9x100mm cup&cone ball bearings
MOYEU ARRIÈRE	KT TV-3R 9x110mm cup&cone ball bearings

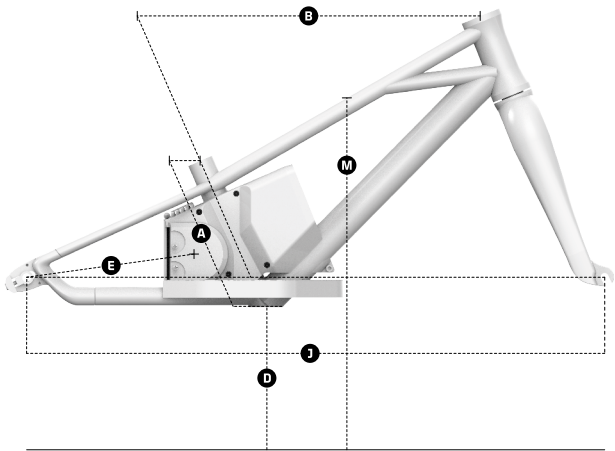

GÉOMÉTRIE

Taille	12"	
A	Longueur de tube de selle	155 mm
B	Longueur de tube supérieur	400 mm
C	Déport d'axe de pédalier	/
D	Hauteur de l'axe de pédalier	150 mm
E	Longueur de bases	285 mm
F	Angle réel de tube de selle	/
G	Angle effectif de tube de selle	/
H	Angle de direction	/
I	Fork Offset	/
J	Empattement	695 mm
K	Longueur de colonne	/
L	Reach	/
M	Stand Over	345 mm

MODÈLE	COULEUR	12"
Grommy 12	Noir / Bleu Ciel / Rouge Flamme	010.21353

PNEU AVANT	Vee Tire Crown Gem 12x2.25 27TPI Wired Bead
PNEU ARRIÈRE	Vee Tire Crown Gem 12x2.25 27TPI Wired Bead
PÉDALIER	/
PLATEAUX	10T, steel
BOITIER DE PÉDALIER	/
PÉDALES	/
CHAÎNE	KMC Z33 Half Link, 1 speed.
DÉRAILLEUR AVANT	/
DÉRAILLEUR ARRIÈRE	/
SHIFTERS	/
CASSETTE	DNP freewheel 16T
MOTEUR	MDK brushless 250w Outoput
BATTERIE	MDK 4Ah 80Wh
DISPLAY	MDK LED Throttle 3speed postition, battery range
PATTE DE DÉRAILLEUR	/
DIVERS	/
POIDS SANS PÉDALES	7.5 kg